

SCIENTIFIC AMERICAN


[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyrighted, 1889, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LX.—No. 26.
ESTABLISHED 1845.

NEW YORK, JUNE 29, 1889.

\$3.00 A YEAR.
WEEKLY.

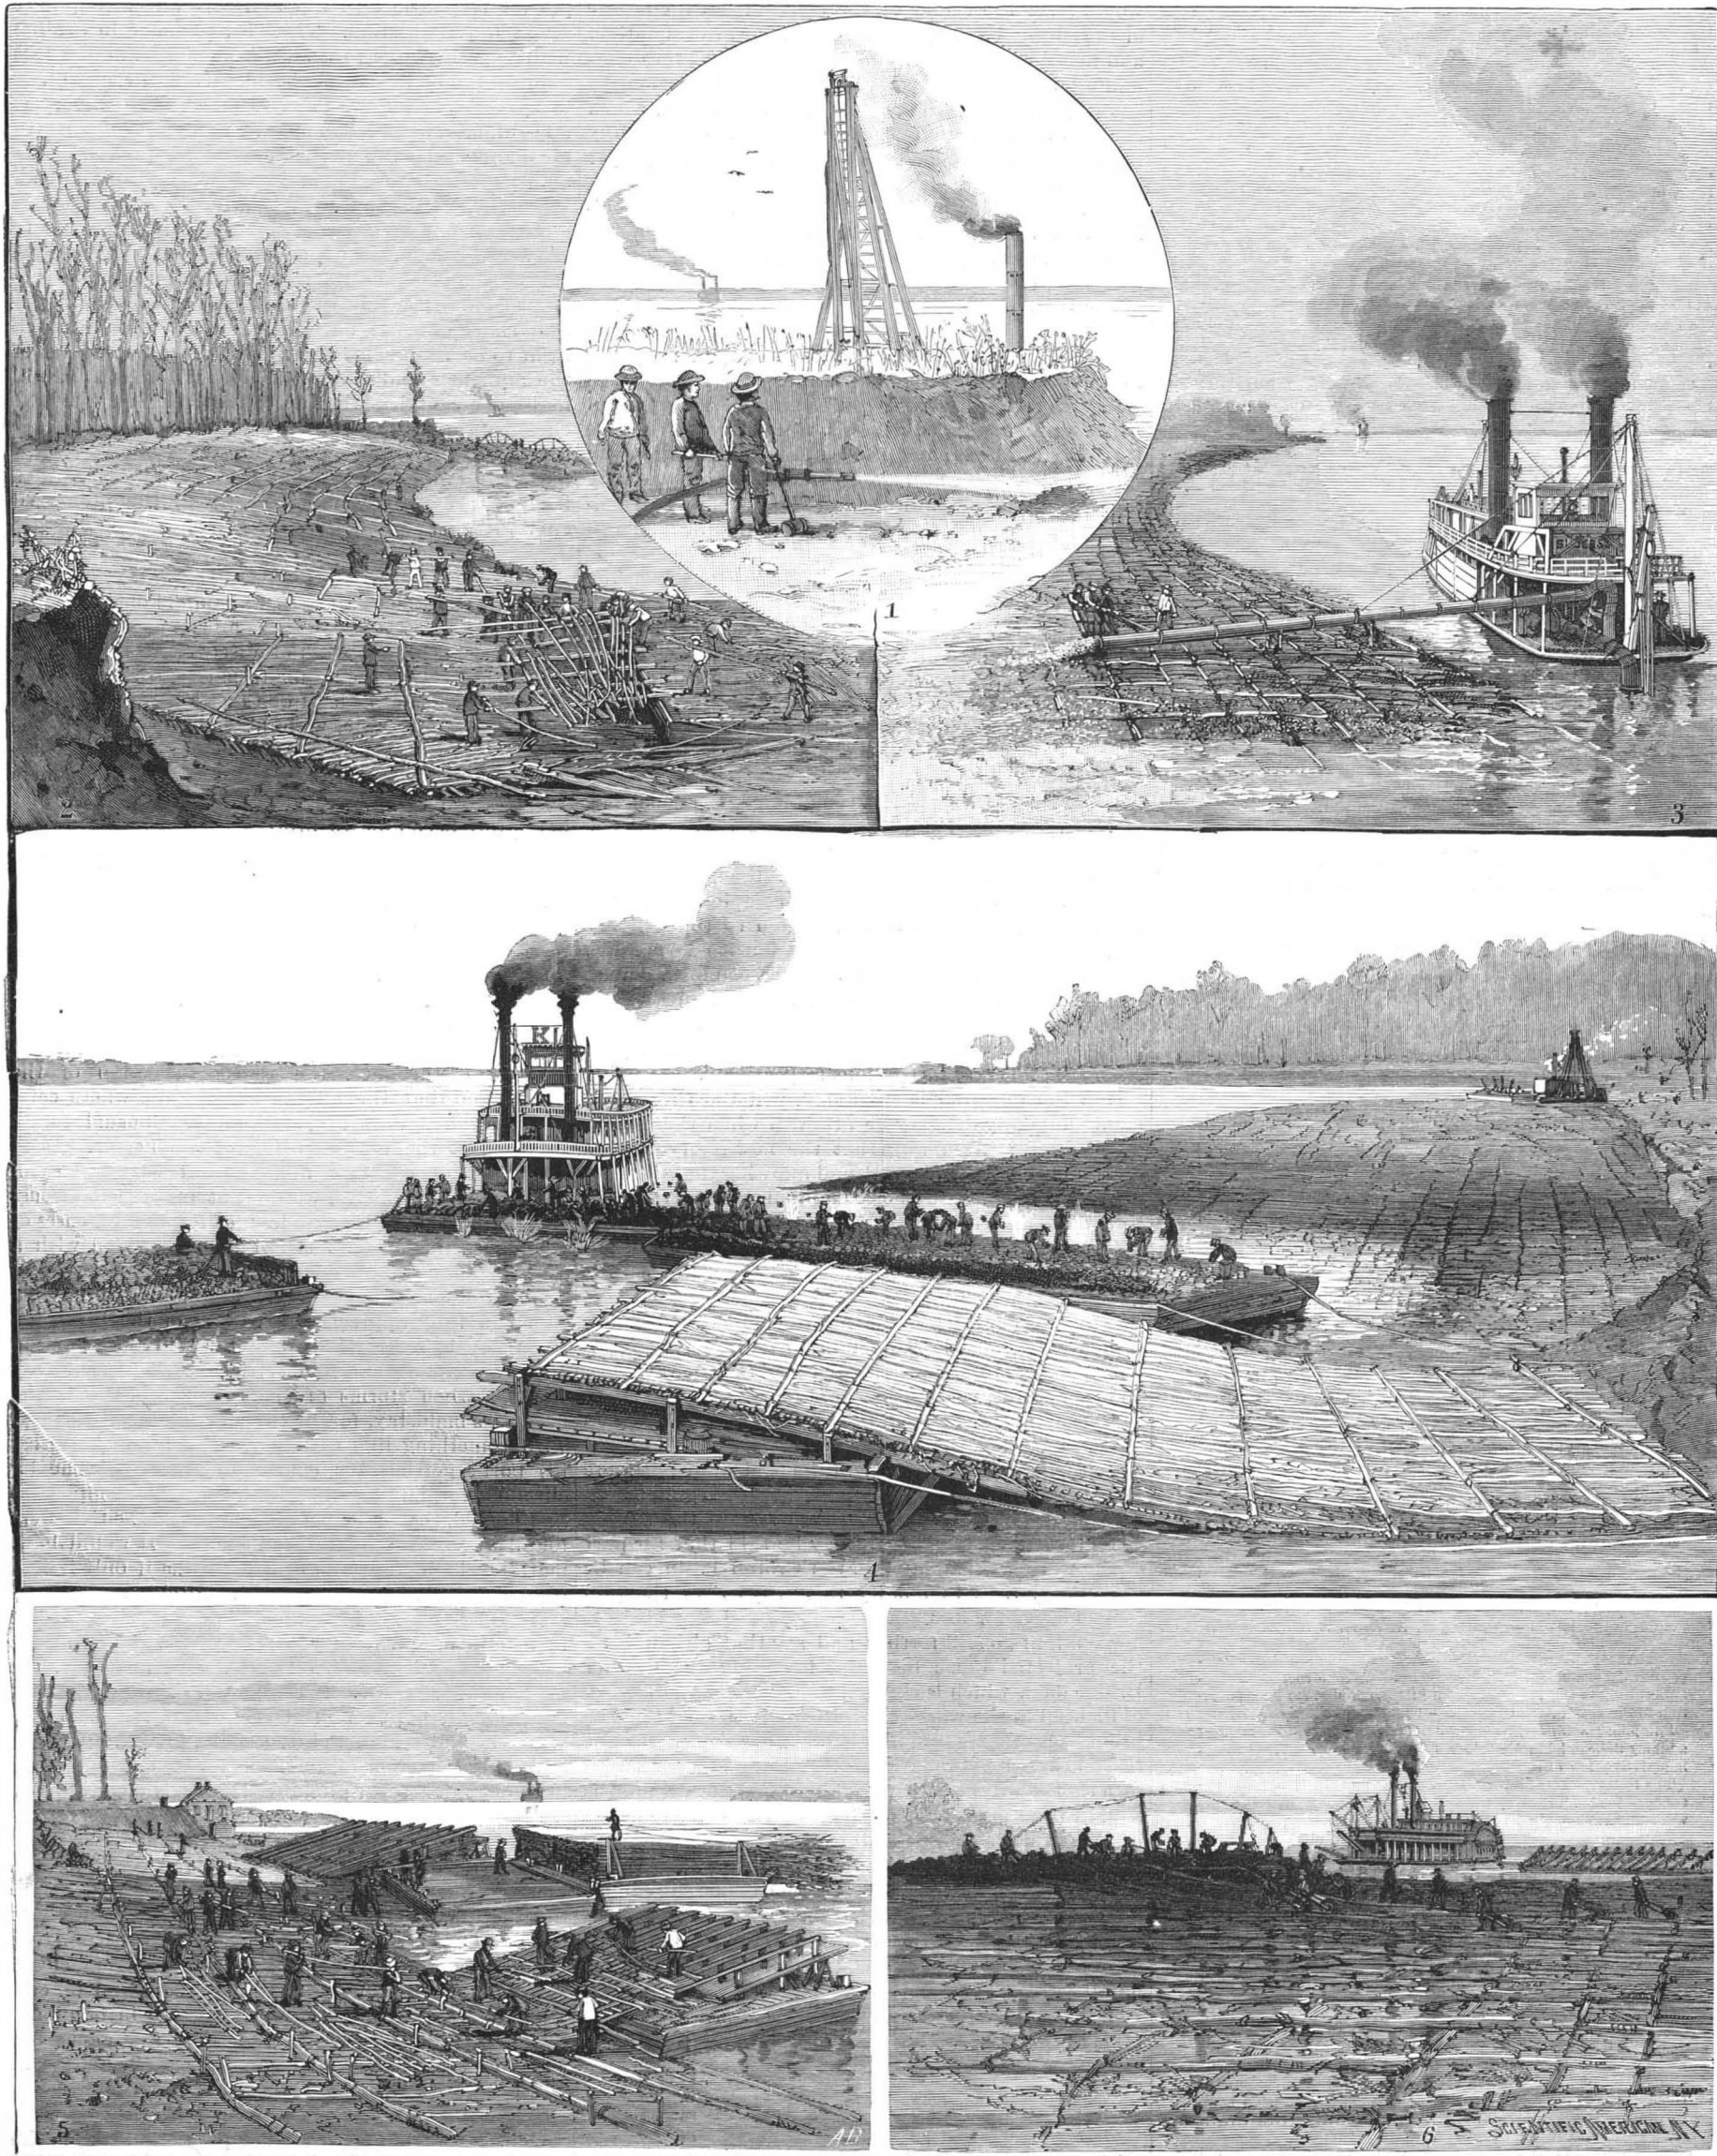

1. Hydraulic grading. 2. Bank revetment in progress. 3. Sinking drift by pumping sand upon it. 4. Sinking sub-aqueous mat. 5. Load of brush and weaving barge. 6. Ballasting sub-aqueous mat.

U. S. GOVERNMENT IMPROVEMENTS ON THE MISSISSIPPI RIVER AT PLUM POINT, ABOUT FIFTY MILES ABOVE MEMPHIS.—[See p. 405.]

© 1889 SCIENTIFIC AMERICAN, INC.

POSITION OF THE PLANETS IN JULY.

JUPITER

is evening star, and, as usual, during the month after opposition, is most favorably situated for observation. He rises before sunset on the 1st, and a glance at the southeastern sky will reveal his presence as soon as the twilight begins to fade. At the close of the month, he has so far advanced on his course toward the sun that he is on the meridian soon after 9 o'clock. He is very brilliant in spite of his great southern declination. Jupiter sets on the 1st at 4 h. A. M. On the 31st he sets at 1 h. 47 m. A. M. His diameter on the 1st is 44".6, and he is in the constellation Sagittarius.

VENUS

is morning star. She reaches her greatest western elongation, or greatest distance west of the sun, on the 10th, at 4 h. A. M., being then 45° 44' west of the sun. After elongation, she retraces her steps toward the sun, her brilliancy slowly decreasing as she recedes from the earth. She will be a charming object in the morning sky throughout the midsummer month, especially on the morning of the 23d, when approaching conjunction with the waning moon. Venus rises on the 1st at 1 h. 50 m. A. M. On the 31st she rises at 1 h. 37 m. A. M. Her diameter on the 1st is 26".4, and she is in the constellation Taurus.

MERCURY

is morning star. He reaches his greatest western elongation on the 12th, at 5 h. A. M., and then, like his more brilliant neighbor Venus, begins to retrace his steps toward the sun. At elongation he is 20° 47' west of the sun, and favorably situated for observation with the unaided eye, on account of his high northern declination. Mercury rises on the 1st at 3 h. 39 m. A. M. On the 31st he rises at 4 h. 17 m. A. M. His diameter on the 1st is 10".0, and he is in the constellation Taurus.

SATURN

is evening star. He is so near the sun as he approaches conjunction, that he will soon be hidden in the sunlight, setting less than an hour after the sun on the last day of the month. He is visible in the early part of the month in the northwest, moving eastward and slowly approaching Regulus. Saturn sets on the 1st at 9 h. 41 m. P. M. On the 31st he sets at 7 h. 52 m. His diameter on the 1st is 15".4, and he is in the constellation Leo.

MARS

is morning star, and makes seemingly little progress in his approach toward our planet. He rises on the 1st at 4 h. 11 m. A. M. On the 31st he rises at 3 h. 47 m. A. M. His diameter on the 1st is 4".0, and he is in the constellation Gemini.

URANUS

is evening star. He is in quadrature with the sun on the 9th at 8 h. P. M. He is in good position for telescopic observation, and may be easily found on account of his near approach to Spica. Uranus sets on the 1st at midnight. On the 31st he sets at 10 h. 3 m. P. M. His diameter on the 1st is 3".6, and he is in the constellation Virgo.

NEPTUNE

is morning star. He rises on the 1st at 2 h. 11 m. A. M. On the 31st he rises at 0 h. 15 m. A. M. His diameter on the 1st is 2".5, and he is in the constellation Taurus.

Mercury, Mars, Venus, and Neptune are morning stars at the close of the month. Jupiter, Uranus, and Saturn are evening stars.

The 36-Inch Lick Telescope.

We have received from Messrs. Warner & Swasey, Cleveland, O., who constructed the mountings of this great instrument, a fine print of same which they have lately caused to be engraved.

This instrument, the largest and most powerful refracting telescope in the world, was erected in 1888 at the Lick Observatory, which is located on Mt. Hamilton, in Santa Clara County, California. It is about fifty miles southeast of San Francisco, and twenty-six miles east of San Jose. It is 4,200 feet above sea level, and in sight of the southern end of San Francisco Bay.

The column is of cast iron, 10×17 feet at the base and 4×8 feet at the top, and weighs 20 tons. On this rectangular column rests the head, weighing 4 tons, in which is journaled the polar axis.

Around this head is a balcony, on which the assistant astronomer is stationed. By a system of wheels he is able to adjust the instrument on any star desired, and read its position by microscopes illuminated by electric light. Access to the balcony is gained by a spiral staircase on the south side of the column.

The polar axis is of steel, 12 inches in diameter, 10 feet long, and weighs 2,700 pounds. The declination axis is also of steel, is 10 inches in diameter, 10 feet long, and weighs 2,300 pounds.

The tube is of steel, 57 feet long. Its diameter is 4 feet at the center, tapering toward each end to 38 inches. The tube complete, with all its attachments, weighs 5 tons. This is made to follow the star by means of a driving clock, weighing one ton, controlled

by a double conical pendulum which is placed near the top, and within the column, and is reached by a landing from the spiral staircase. At the side of the great tube three small telescopes of 6 inch, 4 inch, and 3 inch aperture are attached, which serve as finders.

The magnifying power ranges from 180 to 3,000 diameters.

The object glass is 36 inches clear aperture, and weighs, with its cell, 532 pounds. By special accessories the telescope is adapted to spectroscopic, photographic, and micrometric work.

The center of motion is 37 feet above the base, and when the telescope is pointed to the zenith, the object glass is 65 feet above the base of the column. When turning the instrument in declination, the weight that is put in motion is 7 tons, and when turning it in right ascension 14 tons is being moved. The total weight of the instrument is 40 tons.

The Paris Exhibition.

THE FRENCH LOCOMOTIVE EXHIBIT.

PARIS, June 5, 1889.

If as much could be said of the design of the French locomotives as can be said for the workmanship, this would be a grand exhibit for quality as well as magnitude, but the French seem to have got very little further than Crampton did in the improvement of the locomotive. Crampton undoubtedly did a very great deal for the locomotive of his day, but very little of it remains in present practice outside of France. When Napoleon the Second visited Queen Victoria the engine which took him from Dover to London was No. 149, a Crampton engine, with an intermediate crank shaft and having a single pair of driving wheels behind the firebox. A very large part of the journey was made at a speed of over 60 miles an hour. This class of engine has, however, gone out of use even in France, notwithstanding that it survived all other forms of Crampton engines in England. None of Crampton's designs was copied in America that I ever heard of, except perhaps the use of a perforated pipe running along the steam space, so as to dispense with the steam dome.

A very large proportion of the French locomotive exhibit consists of compounded engines, and in this case the Crampton plan of a return crank carrying the eccentrics serves well for the outside cylinders. Locomotive No. 2,367 of the Chemin de Fer du Nord is a compound six-wheel coupled engine with Crampton valve gear. In this engine there is a good deal of overhanging weight forward of the leading wheels—an alleged defect for which Bodmer's locomotive was condemned by the English government after it had run off the rails. Another exhibit of the same company has the Joy valve gear, which lends itself with many advantages to the compound system.

Locomotive No. 623, exhibited by the Chemin de Fer de l'Ouest, has inside cylinders, with Crampton valve gear. The coupling rods on this engine are outside the Crampton eccentrics, so that the return crank not only drives the valve gear, but also drives the trailing driving wheels—a construction which seems to me to be thoroughly bad. The valves are on top of the cylinder, inside the smoke box. The links for the valve gear are straight bars, the link itself lifting upward and the link die moving downward. On account of the eccentrics for the link motion being inside the side rods, the back driving-wheel axle box has a collar on it equal in thickness to the two eccentrics, this construction being necessary in order to keep the coupling or side rods in line. This engine is provided with a screw for working the reversing lever. The workmanship of this engine is exceedingly good. The Societe Alsacienne des Constructions Mecaniques exhibit a compound locomotive in which the inside cylinders connect to the front pair of 5 ft. 6 in. driving wheels, while the outside cylinders drive the back pair of 5 ft. 6 in. driving wheels, the two pairs of wheels not being coupled. This arrangement I consider to be decidedly objectionable, considering that there is but little room for a receiver in a locomotive. A Joy's valve gear is employed for the outside cylinders, the slide spindle guide being suspended from the lower guide bar. In connection with this engine a peculiar feature of French locomotive practice may be noted, viz., that the steam chest comes in beneath the cylinders, and parallel with the ground, so that it can only be got at when the engine is standing over a pit. On speaking to a French engineer on this point, he answered, "We do not find it inconvenient. What could we want to get at the valves for, unless the engine is in the shop for examination or repairs? When we put the valves in, we put them in right and we attend to the lubrication properly, and if you in England or America have to arrange to get at the valves when the engine is in service, there is something wrong in your practice or construction." To an argument of that kind nothing can be said, unless one has statistics to fall back upon to show that it does or does not in practice prove inconvenient to place the cover in such a position.

The Chemin de Fer de Paris-Orleans exhibit engine No. 479 of 1889, which has inside cylinders, but Crampton valve gear with Gough links. The piston stroke of

this engine is greater than I ever saw in modern locomotive practice, being at least twice the piston diameter. A feature on this engine (the bracing of the inside cranks with iron hoops) is noticeable as representing common French practice. At the works of the Chemin de Fer du Nord at Hellemmes, they told me they found this necessary. But it is not found necessary in England (where a very large majority of the locomotives have inside cylinders, and therefore crank shafts), unless in the case of the appearance of cracks. Hence it naturally suggests itself that the use of the Crampton gear throws extra strain on the crank shafts, thus rendering the hooping necessary. The connecting rods of this engine have their straps and butt ends fitted with dies V-shaped at the ends—a construction rarely found nowadays in England or America. Another and not by any means a pleasing feature of this engine is that it is lagged all over with sheet brass, which is both unmechanical and in bad taste, besides being both ugly and expensive. The axle boxes are highly polished, in fact, burnished, as are also all that is visible of the springs. The buffer plates also are highly polished and have, at the back, some unnecessary fancy curves belonging to an era of the past when ogee scrolls were considered beautiful on engines or machines.

A compound locomotive on the Malet system appears among these exhibits to advantage, the high pressure cylinder being on one side of the engine and the low pressure cylinder on the other. This avoids a good deal of the excessive complication shown on some of the other compound engines, but it does not follow that it accomplishes what is required in a compound engine, and I may refer to it and some other features of French locomotives at a future time.

The Societe Alsacienne, Usine de Belfort, exhibit a locomotive with a valve gear composed of a sort of a trip mechanism actuated by a Crampton return crank and a rod from crosshead *a la Joy*. It is a wonderful compound of cam, screws, bevel gears, tongues, spiral springs, etc., all of a heap, and is doubtless the first, and is pretty sure to be the last, of its race. I hope the inventor had a good idea of what he wanted to accomplish, but cannot compliment him on his method of accomplishing it.


Another compound locomotive has the low pressure cylinder on the outside and a Joy valve gear. The high pressure cylinders are inside, with an ordinary link motion. The piston rods of the outside cylinders of this engine are, say, 3 inches in diameter and 10 feet long, passing through a bush guide provided in the guide bar hanger—a piece of designing not likely to be followed. There is one locomotive with a truck of the American form in the front, and I understand that, in a new and improved form of locomotive being got out by the Nord, the American truck is to be used, and some other features tending more toward English and American practice. The general appearance of French locomotives is not at all elegant or attractive to a mechanical eye, for there are too many bent pipes, cranked arms, and twists and turns in the various parts. It must be confessed that in this matter there is room for improvement in American practice too, and that the most pleasing and mechanical looking locomotive made is the English, with its straight lines and few bends or curves. It looks so simple and straightforward, and as if everything came fair in its proper place without having to be turned aside to get out of the way of something else. In French locomotive construction there is less uniformity than in any other I have as yet seen, and it seems quite clear that it is in a state of transition. At present, for example, you can find almost every form of connecting rod that can be found in the present or past practice of engine building; but at the same time the old patterns predominate. In link motions there are more old styles than new, and in valve gears a feature I never saw in any engine practice, and which I reserve until I have had a better opportunity of examining it.

The workmanship both for fit and finish on the French locomotives is very good, better, much better, than in either American practice. How much of the work is hardened in the case of steel, or casehardened in the case of iron, I have not as yet learned, but from the importance of this point I will look into it. There is not much cast iron work about these locomotives. I notice some steel wheels with solid webs, after the American style, and some wooden wheels on a locomotive truck, but wooden wheels have not found favor for locomotives either in England or France. All passenger carriages on English railways have wooden wheels (the Mansell pattern), and there is no doubt they are cheap, wear well, ride easy, and are easy upon the permanent way.

There are one or two locomotives here with very odd looking square smoke stacks, that are so large at the base as to create the suspicion that there might be a feed water heater inside them, but more of this anon. There is quite a large exhibit of French railway carriages and one or two dummies for street railways, but as this part of the exhibit is not quite complete, it may be reserved for the present. JOSHUA ROSE.

AN IMPROVED FLOORING JACK.

The illustration herewith represents a jack for laying floors, clamping sash, etc., which may be conveniently manipulated and used for various purposes. It has been patented by Messrs. Herman F. Townsend and Charles T. Winslow, of Groton Pond, Vt. The body has a threaded bore, and at its outer end has an inclined head or base, upon which is attached a plate having teeth in its lower edge, the plate being attached by screws, so that it can be readily removed. The inner end of the body has ears, whereby the device may be fastened to the floor or attached to the sides or ceiling of a building or room. A threaded spindle

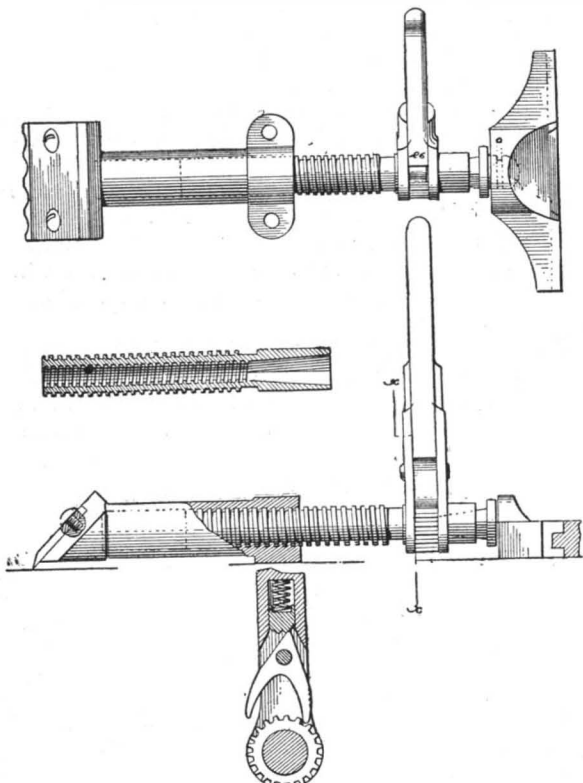


TOWNSEND & WINSLOW'S FLOORING JACK.

is secured in the bore of the body, this spindle being tubular and threaded on its interior, both interior and exterior threads extending to within a short distance of the outer end, which is enlarged and provided with a tapering rectangular bore and attached ratchet wheel. At each side of the latter are journaled the members of a lever, the inner end of which is bifurcated, or provided with arms attached upon opposing sides. In the end of the lever between the arms is a longitudinal recess in which is a spring having secured to its lower end a head-block with beveled sides and a central notch, the head-block being adapted to slide in the recess, as shown in one of the views. Between the arms of the lever and the head-block is pivoted a V-shaped dog, the angled body of which engages with the head-block and the members with the ratchet wheel, either member being thrown in engagement according to the direction in which the spindle is to be revolved. In operation, the teeth of the body-plate are driven into the floor beam, joist, or other support, and the clamp-block is forced forward by means of the ratchet lever, thereby revolving the spindle, which is interiorly threaded to admit of the attachment of a drill chuck or point, if it is found desirable to use the ratchet in that connection.

TORPEDO BOATS.

An able paper was read, not long ago, before the United Service Institution, by John Donaldson, on the recent improvements in Thornycroft torpedo boats.

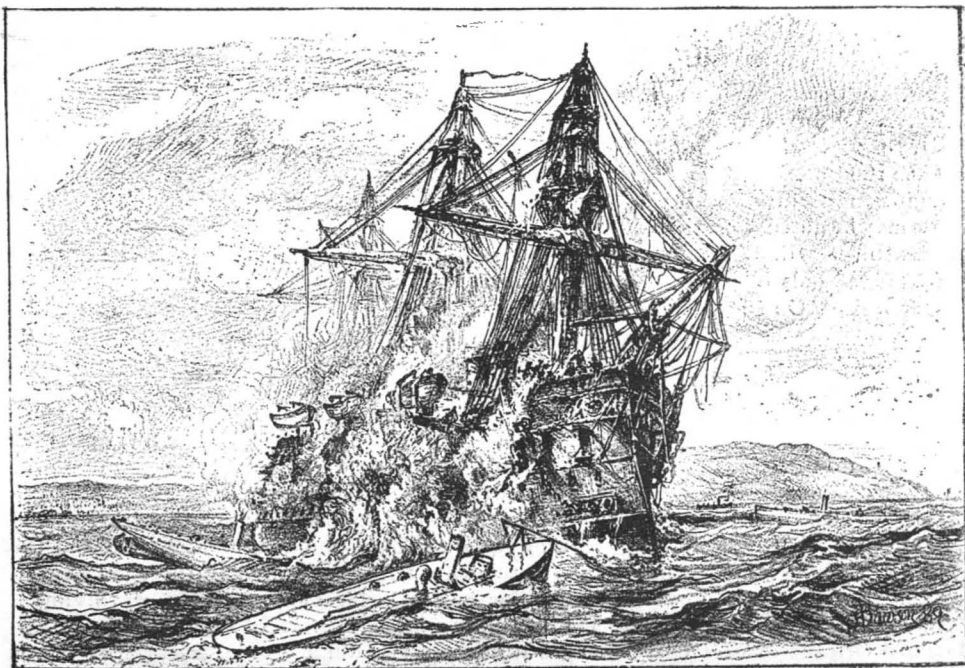

HOW TORPEDO BOATS ARE MEANT TO ATTACK IRONCLADS.

It was accompanied by various diagrams, among them an illustration, which we give, intended to show how these little vessels are expected to operate in attacking one of the great French ironclads. In the discussion, Admiral Barnaby, speaking of the torpedo boats, said:

"It is undoubtedly true that she can be pierced by shot. I have heard that so often said concerning big ships, for which I was responsible, that I can sympathize with our friends the torpedo boat builders when it is said that the shots can get in. Of course they can, and I have no doubt the people in the torpedo boat will feel terribly nervous when they are going to make the attack. But be perfectly sure the people will be very nervous on board the ironclad that is going to be attacked. That is an important thing. If you can succeed in making the other fellows nervous, never mind that you are running some risks yourselves. The real point lies, I think, there. It can be of no use to attempt to give protection against shot. I know that in France, where they have enormous ironclads of 11,000 and 12,000 tons, they are as nervous as can be over this fact, that the whole of their batteries can be searched out by machine gun fire. They know that, and they do not see how to remedy it. But if you cannot remedy it in a ship like that, what are you going to do with such vessels as these? The best thing you can do is to get a number of them and make them as good as ever you can."

Bicycles.

The Supreme Court of Indiana was recently called upon to review a non-suit in an action brought to recover damages for being struck down on sidewalk by a bicycle rider. The trial court had held that bicycling was a form of pedestrianism, and that the bicyclers had as much right on the sidewalk as any pedestrian. The appeal from the non-suit was argued in the forenoon. When the court adjourned for dinner, Judges Coffey and Berkshire started to walk to their hotel, and as they were passing out of the capitol grounds a clumsy bicycle rider ran into them, knocking both down, and badly bruising the former. This practical argument had such a convincing effect on the minds of the learned judges that they immediately overruled their unrendered decision and filed an opinion setting forth that a person who "rudely and recklessly" rides a bicycle against a man standing on a sidewalk is responsible for damages for assault and battery.

After quoting an Indiana law forbidding persons from riding or driving on the sidewalks, the court says: "If sidewalks are exclusively for the use of footmen, then bicycles, if they are vehicles, must not be ridden along them, since to affirm that sidewalks are exclusively for the use of footmen necessarily implies that they cannot be traveled by bicycles. It would be a palpable contradiction to affirm that footmen have the exclusive right to use the sidewalks and yet concede that persons not traveling as pedestrians may also rightfully use them. We think, however, that a bicycle must be regarded as a vehicle within the meaning of the law."—*N. Y. Law Journal*.

Testing the Safety Apparatus of the Otis Elevators at the Eiffel Tower.


At the Eiffel tower, an experiment was performed recently which produced a strong impression on those present. The engineer of the American firm of Otis subjected the Otis lift to a final test before handing it over for public use. The lift, the car of which consists of two compartments, one above the other, weighs 11,000 kilogs., and loaded with 3,000 kilogs. of lead—that is to say, weighing 14,000 kilogs—was raised to a considerable height. There it was fastened with ordinary ropes, and this done it was detached from the cables of steel wire with which it is worked. What

was to be done was to cut the ropes, and allow the lift to fall, so as to ascertain whether, if the steel cables were to give way, the brakes would work properly and support the lift. Two carpenters armed with great hatchets had ascended to the lift, and were ready to cut the cables. At a given signal, a blow cut the rope. The enormous machine began to fall. Every one was startled, but in its downward course the lift began to move more slowly, it swayed for a moment from left to right, stuck on the brake, and stopped. There was a general

cheering. Not a pane of glass in the lift had been broken or cracked, and the car stopped without shock at a height of ten meters above the ground.

AN IMPROVED DRAWBRIDGE SIGNAL.

A drawbridge signal, which shall be automatically displayed when the bridge is open, is shown in the accompanying illustration, and has been patented by Mr. M. H. Long, of Sabula, Iowa, the small figure giving a sectional view of the signal-operating mechanism. To the under side of each end of the draw is connected a double cam-faced flange, and upon the bridge approach is mounted a crane, which carries a

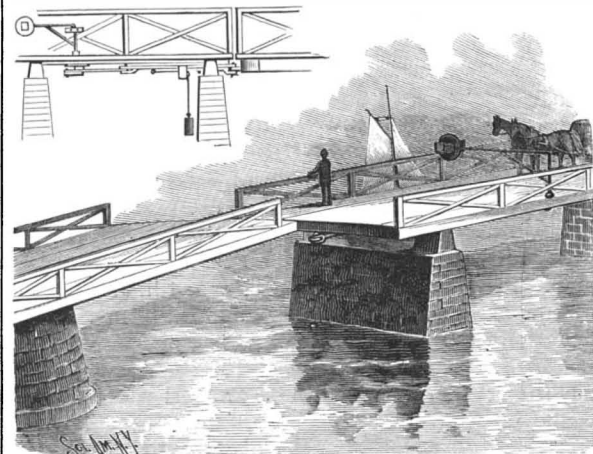


LONG'S DRAWBRIDGE SIGNAL.

disk, to serve as a day signal, and a box in which a lamp may be placed for a night signal. The crane is supported by a collar resting upon a wear-plate, centrally apertured to provide for the passage of the crane-standard, to the lower end of which is secured a sleeve, which carries a sliding lever-arm, pivotally connected by a link with one arm of a bell-crank lever mounted beneath, the other arm of the lever being connected to a slide. Upon the forward end of this slide is an anti-friction roll, borne upon by the cam-flange of the draw, so that when the latter is in closed position the disk-supporting arm will be held substantially parallel with the roadway. In order that this arm may be moved to indicate the open position of the draw, a weight is connected to the slide by a rope or chain, whereby, as the draw is opened, the disk-supporting arm is automatically carried to a position across the bridge roadway, being again returned to its normal position on the closing of the draw.

A LOCK-HOUSE FOR SWITCH-STANDS.

The accompanying illustration represents a strongly constructed house for a switchman, erected adjacent

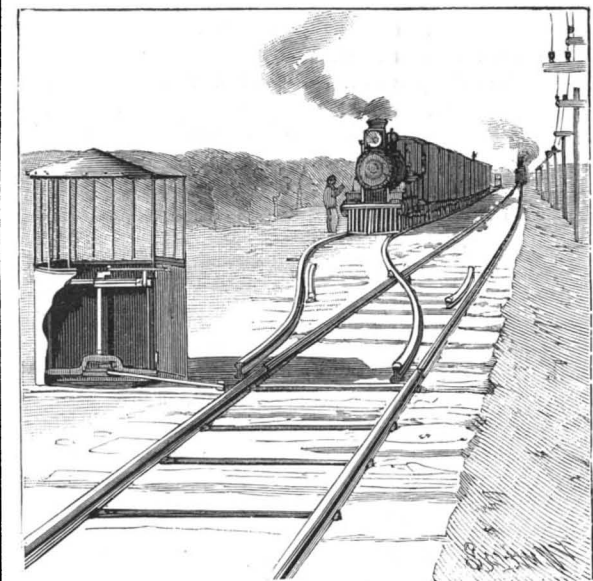


MC CARTHY'S LOCK-HOUSE FOR SWITCH-STANDS.

to the switch for a siding, to operate which the operator has to enter the house, and cannot again leave it till the switching rails have been returned to open the main track. The invention forms the subject of a patent issued to Mr. Wm. J. McCarthy of Menominee, Mich. The house, shown partly in section, is of sheet metal, with a lower flange adapted to be bolted to switch ties, the upper section of the house being open, for the convenience of the operator in giving signals, and having a sheet metal roof. Within the house is arranged a switch-stand of any proper construction, the vertical crank-shaft of the stand having an upper crank connected by a link to an eye secured to the inner side of the door. The vertical crank-shaft has the usual operating lever, which, when the siding is open, occupies a position to hold the door of the house closed, retaining the attendant until the lever has been thrown to a position to move the switching rails to open the main track. This construction is also designed to prevent the interference of meddlesome people with the switch rails.


AN IMPROVED SUNSHADE FOR VEHICLES.

The accompanying illustration represents a simple and readily manipulated device, whereby the eyes of the driver may be shielded from the sun, while the device may be readily folded up and concealed out of sight when not desired for use. This invention has been patented by L. V. Luce, of No. 585½ St. Charles Avenue, New Orleans, La. Fig. 2 represents a

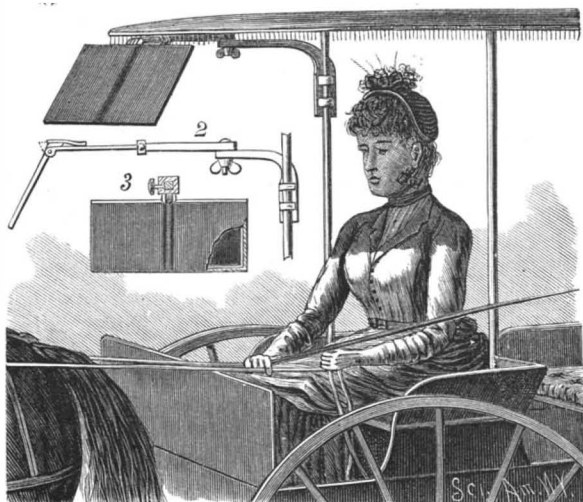

SUNSHADE FOR VEHICLES.

side elevation of the device, Fig. 3 showing the shade, partly in section. An angular bracket is adapted to be secured by clamps to one of the supports of the canopy of the vehicle, a horizontal arm being pivoted to the bracket, and this arm having a recess adapted to receive a rod with enlarged head, slotted to receive a lug forming a portion of the shade. This shade is preferably rectangular in form, and covered with cloth, leather, or other suitable material, the central bar of the shade frame terminating in the lug by which it is attached to the rod extending from the horizontal arm.

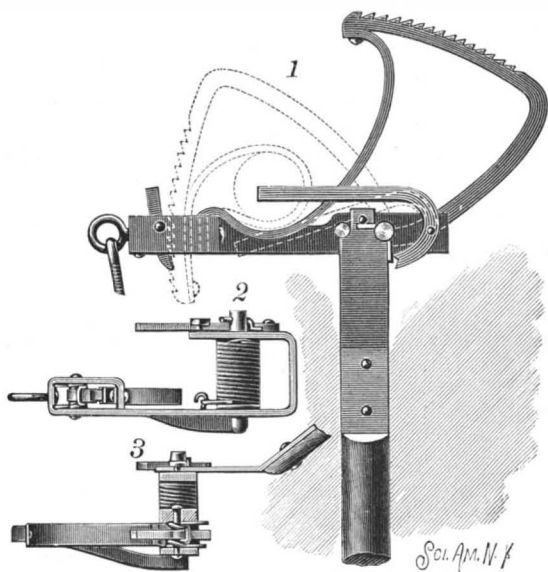


WICKHAM'S DEVICE FOR CATCHING ANIMALS

The device may be readily and conveniently attached to or detached from any vehicle; and by means of the thumb screw by which the horizontal arm is attached to the bracket, the shade may be conveniently moved to any desired position in front of or at either side of the driver, according to the direction in which the sun is shining.

A STOVEPIPE ANCHOR AND FLUE CLEANER.

The accompanying illustration represents a device for locking stovepipes to the chimneys, and also pro-

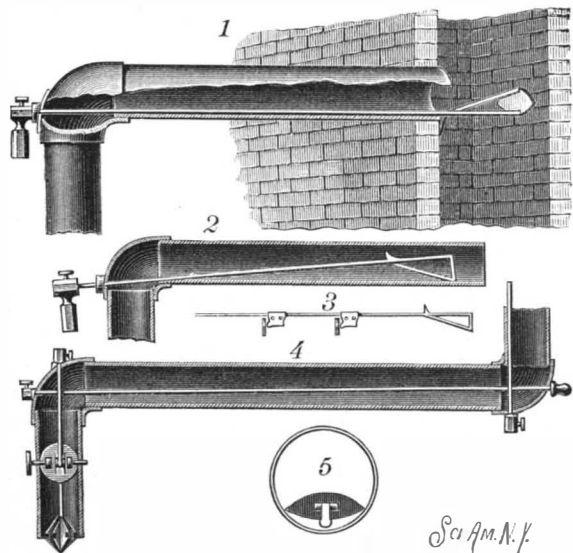

OLDFIELD'S STOVEPIPE ANCHOR AND FLUE CLEANER.

viding for the cleaning of the pipes. It has been patented by Mr. Leonidas H. Oldfield, of No. 72 West Washington Street, Chicago, Ill. Fig. 1 is a sectional view of the device when used to anchor a pipe to a chimney, and Fig. 4 represents a stovepipe tied therewith. Fig. 2 shows the device in position for use as a pipe cleaner, Fig. 3 representing the rod provided with additional cleaners, while Fig. 5 represents a cross section of pipe with additional cleaners, which, when not in use, are made to assume a horizontal position. The invention consists essentially of a rod with a spur extending from one side and a plate extending from the other side, a catch or handle being arranged in connection with the rod, the rod being held in place to lock the parts by a thumb screw on its outer end. To clean the pipe the handle is turned up to free the spur from engagement with the flue wall, bringing it into the position shown in Fig. 2, when the soot may be readily removed by reciprocating the rod.

AN IMPROVED ANIMAL CATCHER.

The illustration herewith represents a recently patented device specially adapted for catching hogs, sheep, etc., by the leg. Fig. 1 represents a plan view of the device, the full lines showing it as set for use, while the dotted lines represent the position of the parts when in engagement round an animal's leg. Fig. 2 is a side elevation of the device, and Fig. 3 a sectional end elevation. The main frame of the device has a handle by which the operator moves a tripping lever therein against the animal's legs, when the handle becomes detached, as the animal is caught, the operator then holding the animal by a rope attached to a ring in the other end of the frame. A shaft, actuated by a spring, is mounted to turn in the frame, the tripping arm being held on the shaft, while a segmental arm is also held on the shaft, and a band, preferably of leather, is secured to this segmental arm and to the frame. A spring pawl is fulcrumed on the frame and adapted to engage the notches on the segmental arm as it is brought to closed position, folding the leather band around the animal's leg, and locking it in place.

For further particulars with reference to this invention, address the inventor, Mr. Thomas Wickham, in care of James Wickham, No. 212 South Barstow, Eau Claire, Wis.

AN IMPROVED SPRING BACK FOR STOOLS, ETC.

A spring back for use on piano and organ stools, chairs, and office stools, and especially the high desk stools used in banks, etc., is illustrated herewith, and has been patented by William P. James, of Lincolnton, N. C. Figs. 1 and 2 represent side and rear elevations showing the device as applied, and Fig. 3 a sectional view. The seat may be of any desired shape, but the back support is connected thereto by a frame, preferably of round bar iron, having two downwardly projecting limbs, each suitably bent and formed with a crook where the frame comes close to the back of the seat. The frame is here connected to the seat by metal loops, and is further bent below to form a loop projecting inward beneath the seat. A spiral spring, bearing at one end against a plate secured to the under side of the seat, bears at its opposite end against the loop portion of the frame, which has its motion limited by working within a hook forming part of the spring-carrying base, to restrict the spring seat back from working either too far forward or backward. By this construction the frame is restrained from independent up or down and lateral movement, but is free to rock forward and backward.

CRYSTALLIZING FRAMES FOR MONOGRAMS, DESIGNS, ETC.

A special construction of frames prepared to retain crystals, as of salt, alum, or other crystallizing material, for the production of monograms, mottoes, and various designs, is illustrated herewith, and has been patented by Mr. Albert E. Beller, of Ogden, Neb., the illustration also representing an emblematic device thus produced. The frame is an open or skeleton one, formed of wire, wood, or other suitable strips, to inclose or support and form the design. These several wires or strips, or such portions as are intended to be incased by crystals, are then covered or wrapped with soft and flexible or fibrous material, to which the crystals will adhere. The whole frame thus covered is then steeped in any suitable crystallizing solution, and allowed to remain therein until a sufficient deposit of crystals has been made upon the covered portions, the uncovered parts of the frame being left bare by reason of the non-affinity of the crystals to form on or adhere thereto.


Advantage of a Trade Mark.

Last year, says the *Canadian Manufacturer*, a firm in London, Ont., inserted in the papers an advertisement of a stove polish, to which they gave the name "Nonsuch," and which they recommended in a card headed "Hello! Nonsuch." A gentleman who desired to write to the firm forgot their name entirely, but remembered distinctly the "Hello! Nonsuch." So he risked the consequences and addressed his communica-

tion to "Hello! Nonsuch, London, Ont.," and the fame of the article, combined with the quick intelligence of the postal authorities, triumphed over every obstacle, and the letter reached its destination.


AN IMPROVED CAR COUPLING.

A car coupler designed to be automatic in its action, and preclude danger to the trainmen, by obviating the

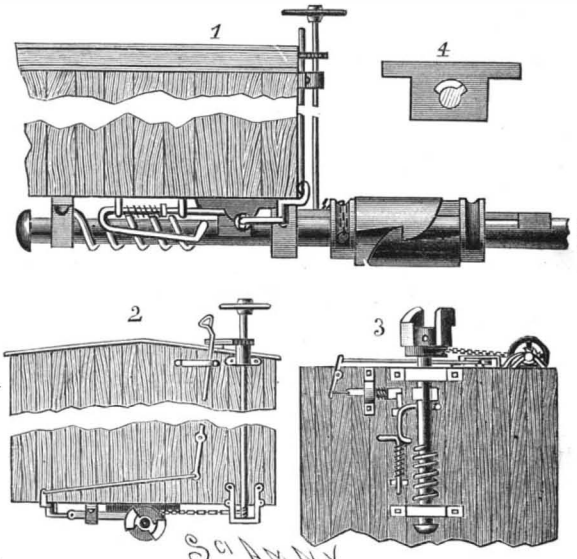

SWENSON'S CAR COUPLING.


necessity of their going between the cars, is illustrated herewith, and has been patented by Mr. Alfred Swenson. Fig. 1 is a side view and Fig. 2 an end view of a portion of a car body provided with this coupler, Fig. 3 being an inverted plan view of the car body and coupler. The draw-bar is made integral with a draw-head having a central cylindrical section and two hooks, with inclined forward edges, and upon the draw-bar is a longitudinal rib, to the rear of which is a flat-faced boss or projection. The forward portion of the draw-bar is supported by a block having a recess within which the longitudinal rib rides, as shown in the sectional view, Fig. 4, such recess acting as a stop to prevent too great rotation of the draw-bar and coupling-head, while a spiral spring around the draw-

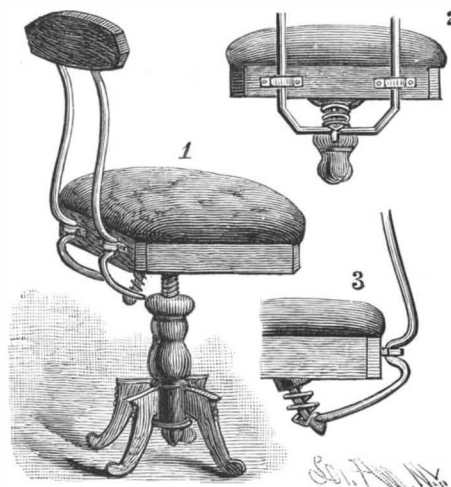

JAMES' SPRING BACK FOR STOOLS OR CHAIRS.

bar causes the rib to normally rest in the position shown in this figure. As two cars provided with this coupler approach each other, the inclined faces of the hooks on the forward ends of the draw-heads are forced to pass each other, when the main spring on the draw-bar causes the hooks to engage each other, as shown in Fig. 1, when the draw-heads are coupled. To uncouple the cars, a vertical shaft is operated, provided with a pawl and a ratchet, and a hand-wheel above the roof of the car. This shaft is connected to the draw-head by a chain bound upon a semi-sheave formed on the draw-bar just to the rear of the draw-head.

For further particulars with reference to this invention, address Mr. Peter J. Palmquist, Greenview, Ill.

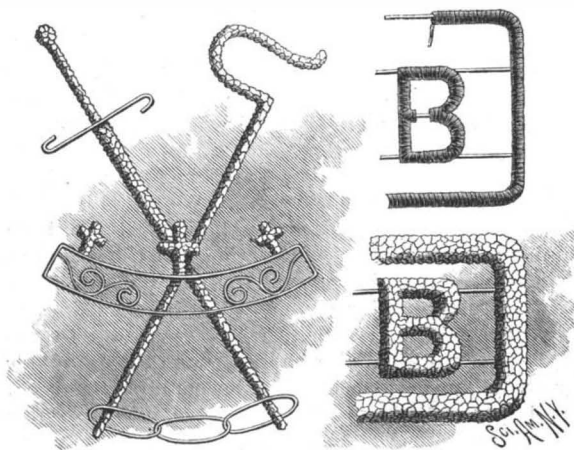

BELLER'S CRYSTALLIZING FRAME.

American Association for the Advancement of Science.

The thirty-eighth meeting of this association will begin in Toronto, Canada, Aug. 27, at the Queen's Hotel, the sessions to continue for a week, and the meeting closing with excursions extending to Sept. 7. A special circular in relation to railroads, hotels, etc., will be issued by the local committee, of which Mr. Charles Carpruael is president and Prof. James Loudon secretary, and members about changing their address for the summer should notify the committee. The officers elected for the Toronto meeting are:

President—T. C. Mendenhall, of Terre Haute, Ind.

Vice-Presidents—A. Mathematics and Astronomy—R. S. Woodward, of Washington. B. Physics—H. S. Carhart, of Ann Arbor, Mich. C. Chemistry—William L. Dudley, of Nashville, Tenn. D. Mechanical Science and Engineering—Arthur Beardsley, of Swarthmore, Pa. E. Geology and Geography—Charles A. White, of Washington. F. Biology—George I. Goodale, of Cambridge, Mass. H. Anthropology—Garrick Mallory, of Washington. I. Economic Science and Statistics—Charles S. Hill, of Washington.

Permanent Secretary—F. W. Putnam, of Cambridge, Mass. (office Salem, Mass.)


General Secretary—C. Leo Mees, of Terre Haute, Ind.

Secretary of the Council—Frank Baker, of Washington.

Secretaries of the Sections—A. Mathematics and Astronomy—G. C. Comstock, of Madison, Wis. B. Physics—E. L. Nichols, of Ithaca, N. Y. C. Chemistry—Edward Hart, of Easton, Pa. D. Mechanical Science and Engineering—James E. Denton, of Hoboken, N. J. E. Geology and Geography—John C. Branner, of Little Rock, Ark. F. Biology—Amos W. Butler, of Brookville, Ind. H. Anthropology—W. M. Beauchamp, of Baldwinville, N. J. I. Economic Science and Statistics—J. R. Dodge, of Washington, D. C. *Treasurer*—William Lilly, of Mauch Chunk, Pa.

A SPINDLE SUPPORT FOR SPINNING MACHINES.

The accompanying illustration represents a spindle support from which the oil cannot be thrown out by centrifugal force, but will be properly distributed to the bearings, and the spindle kept clean. It has been patented by Mr. Joseph Duffy, of No. 48 Wayne Avenue, Paterson, N. J. Figs. 1 and 2 represent a vertical section and elevation of the device with the oil trough in section, Figs. 3 and 5 being horizontal sections through the tubular bearing of the spindle, and Fig. 4 a horizontal section near the base. The tubular socket portion which receives the lower end of the spindle has horizontal arms connected by a vertical portion, the upper horizontal arm having an aperture through which projects a tubular bearing for the spindle, the upper end of this bearing projecting into an annular chamber on the top of the arm and forming an oil chamber. The upper end of this bearing is formed with radial grooves, as shown in Fig. 5, to per-

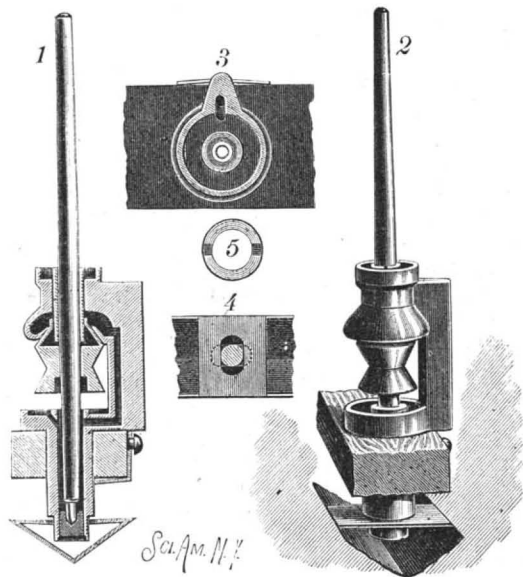

DUFFY'S SUPPORT FOR SPINNING SPINDLES.


mit the passage of oil from the chamber down between the spindle and the tubular bearing. Surrounding the lower end of the aperture in the upper arm is an annular chamber, into which projects the neck of a whirl mounted on the spindle, the whirl having an annular chamber with inclined sides. From one side of the upper annular chamber an oil passage extends down through the vertical arm and the lower horizontal arm to the tubular socket at the base, and beneath the whirl, in the top of the lower horizontal arm, is an annular oil chamber also connecting with the socket at the base. As the spindle revolves, the oil works down into the upper annular chamber, the inclined sides of which prevent its escape, the oil returning to the spindle and up its tubular bearing when the spindle is at rest. Should this chamber become overcharged, the oil is carried by centrifugal force into an outer chamber and into passages finally leading to the tubular socket at the base.

The American Engineers' European Trip.

Some weeks ago we spoke of the visit of the different American engineering societies to Europe. With the Paris exposition as the central feature of interest, they proposed to visit engineering works of importance within an accessible distance. We have already printed a notice of their arrival in London and of the many receptions and entertainments to be tendered them. Already comments on the engineering works of England have begun to reach us from them, the contrast between American and English methods proving quite impressive. It is evident that both in the way of instruction and pleasure the trip will be a memorable one to all concerned, and that a crop of ideas will be gathered that may serve as a source of seed to reproduce in this country the valuable features of the more conservative engineering practice of the older lands.

PALMER'S IMPROVED CARPENTER'S CHISEL.

The illustration herewith represents a chisel or gouge for carpenters' use which has been patented by Mr. Theron H. Palmer, of San Bernardino, Cal. Figs. 1 and 2 represent top and side views of the device, which has its shank and handle portion bent out of line with its blade or cutting portion. The blade is provided with an anvil or hammer block at its rear to form a striking surface, when using a hammer or mallet with the tool to force it up to its work, instead of striking on the end of the handle direct, which is liable to split or bruise the handle.



A Curious Chemical—Oxalomolybdic Acid.

A new substance, singular alike in its chemical nature and in its properties, says *Nature*, has been discovered by M. Pechard. It is a mixed acid derived from oxalic and molybdic acids, and is, therefore, termed "oxalomolybdic acid." The crystals of oxalomolybdic acid, when dry, may be preserved unchanged either in sunshine or in the dark; but, if moist, they quickly become colored blue when exposed to the sun's rays. If characters be written on paper with the solution, they remain invisible in a weak light; but when exposed to sunshine, they rapidly become visible, turning to a deep indigo color. It is curious that this effect only happens when the solution is spread over paper or other surfaces; for the solution itself may be kept unaltered in the bottle for any length of time, except for a trace of blue at the edge of the meniscus, where, by surface action, a little is spread against the interior glass walls. If a sheet of paper be immersed in a saturated solution of the acid, dried in the dark, and then exposed behind an ordinary photographic negative, a very sharp print in blue may be obtained by exposure to sunlight for about ten minutes. The color instantly disappears in contact with water; so that if a piece of this sensitized paper be wholly exposed to sunlight, one may write in white upon the blue ground by using a pen dipped in water. If, however, the paper with its blue markings be exposed to a gentle heat for a few minutes, the blue changes to black, and the characters are then no longer destroyed by water.

Keeping at It.

It is a great mistake to suppose that the best work of the world is done by people of great strength and great opportunities. It is unquestionably an advantage to have both these things, but neither of them is a necessity to the man who has the spirit and the pluck to achieve great results. Some of the greatest work of our time has been done by men of physical feebleness. No man has left a more distinct impression of himself on this generation than Charles Darwin, and there have been few men who have had to struggle against such prostrating ill health. Darwin was rarely able to work long at a time. He accomplished his great work by having a single aim, and putting every ounce of his force and every hour of his time into the task which he had set before him. He never scattered his energy, he never wasted an hour, and by steadily keeping at it, in spite of continual ill health and of long intervals of semi-invalidism, he did a great work, and has left the impression upon the world of a man of extraordinary energy and working capacity. Success is rarely a matter of accident, always a matter of character. The reason why so many men fail is that so few men are willing to pay the price of self-denial and hard work which success exacts.—*The Christian Union*.

The Population of the United States.

The present estimated population of the United States is 64,000,000. The rate of increase, exclusive of immigration, is estimated at 1.8 per cent per annum—about 100,000 a month. By immigration the increase of population averages over 43,000 a month, or over half a million yearly. The aggregate annual growth from both causes will not fall much short of a million, and three-quarters. The estimated foreign population is not far below 14,000,000.


The Sources of Beautiful Colors.

The *American Druggist* has formulated a list of the choicest colors used in the arts, as follows:

The cochineal insects furnish a great many of the very fine colors. Among them are the gorgeous carmine, the crimson, scarlet carmine, and purple lakes. The cuttlefish gives the sepia. It is the inky fluid which the fish discharges in order to render the water opaque when attacked. Indian yellow comes from the camel. Ivory chips produce the ivory black and bone black. The exquisite Prussian blue is made by fusing horses' hoofs and other refuse animal matter with impure potassium carbonate. This color was discovered accidentally. Various lakes are derived from roots, barks, and gums. Blue black comes from the charcoal of the vine stalk. Lamp black is soot from certain resinous substances. Turkey red is mud from the madder plant, which grows in Hindostan. The yellow sap of a tree of Siam produces gamboge; the natives catch the sap in coconut shells. Raw sienna is the natural earth from the neighborhood of Sienna, Italy. Raw umber is also an earth found near Umbria and burnt. India ink is made from burnt camphor. The Chinese are the only manufacturers of this ink, and they will not reveal the secret of its manufacture. Mastic is made from the gum of the mastic tree, which grows in the Grecian Archipelago. Bister is the soot of wood ashes. Very little real ultramarine is found in the market. It is obtained from the precious lapis-lazuli, and commands a fabulous price. Chinese white is zinc, scarlet is iodide of mercury, and native vermilion is from the quicksilver ore called cinnabar.

AN IMPROVED CAR COUPLING.

A car coupling designed for use with a link and pin, and permitting an automatic coupling of two cars on a slight collision, while also adapted for the coupling of cars of different heights, is illustrated herewith, and has been patented by Mr. Vincent Nusly, of No. 718 Franklin Street, Sandusky, Ohio. Figs. 1 and 2 are sectional side elevations of the drawhead, Fig. 3 shows the coupling pin, Fig. 5 is a plan view of the drawhead with the top plate removed, and Fig. 4 is a perspective view of the improvement as applied. Supported by a suitable bearing in the bottom of the car is mounted to slide a bar on the front end of which is the drawhead, a spring holding the drawhead to permit a slight inward motion when two drawheads come together. In an offset on top of the drawhead the coupling pin is held to slide vertically, a notch in the lower end of the pin being engaged by a horizontal slide in the top of the drawhead, this slide having a rearward projection adapted to be engaged by a transverse beam on the front of the car, and having a projecting arm at each side of the drawhead for conveniently moving it by hand. A spring presses against the slide to hold it in engagement with the raised coupling pin until two drawheads come together, when the pin drops to engage the entering link. Near the upper end of the

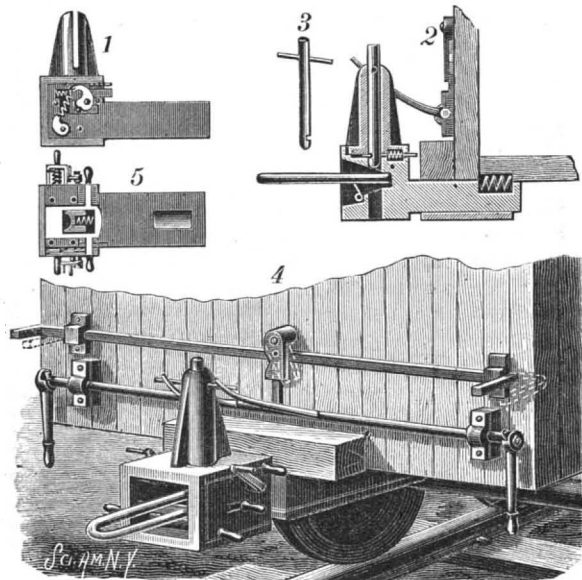

NUSLY'S CAR COUPLING.

coupling pin are arms passing through vertical slots in the offset on the drawhead, the arms on the pin being adapted to be engaged by arms projecting from a shaft extending transversely on the front of the car, each outer end of this shaft having a lever by means of which the shaft may be turned to lift the coupling pin into its raised position. On this shaft is also fastened centrally an upwardly extending arm, adapted to be locked in place by a lock plate pivoted on the front of the car, and pivotally connected with a transverse rod, on each outer end of which is a handle for laterally moving the rod to disengage the lock plate, the locking of the arm holding the pin in its uppermost position when the cars come together, even if the slide is disengaged from the notch in the pin. In the drawhead is a link-raising mechanism, operated by handles at the side, whereby the link may be raised or lowered and held in the desired position to couple cars of different heights.

MISSISSIPPI RIVER IMPROVEMENTS.

For many years the question of the practical feasibility of confining the Mississippi River within fixed channels has been a most important one, not only as it affected the improvement of navigation over this great inland water course, but also from the necessity of protecting great properties along its banks, which have been frequently endangered by its fitful changes. In 1873, for instance, the banks of the river fronting the city of Memphis, Tenn., commenced rapidly caving in, the encroachment of the river destroying extensive sites and endangering costly structures, such as warehouses, elevators, cotton compresses, etc. In 1876 the bank had receded 350 feet, and was continuing to cave in at the rate of 100 feet per annum, thus promising to quickly destroy what had before been the finest harbor on the river above New Orleans, accessible to the largest vessels.

For a long time the national government has made annual appropriations for various improvements of the river, the most of the work so done having been originally for the construction and repair of levees, but in 1879 Congress passed an act organizing the Mississippi River Commission, to take more comprehensive action in regard to the whole matter, and of this commission Major-Gen. Q. A. Gillmore, of the engineer corps of the U. S. army, was president up to the time of his death, April 7, 1888. The general plan of work adopted by the commission contemplated the reduction of the low water width of the river below the mouth of the Ohio to about 3,000 feet by means of permeable dikes, behind which artificial banks should be formed by deposit, and the preservation of the natural curves of the river by revetting caving banks, together with the construction of levees.

Our first page illustrations represent the progress of this work at a portion of the river styled Plum Point Reach, about fifty miles above Memphis, Tenn. The river here takes a great bend into the Arkansas shore, and for a distance of some eighteen miles its channel was constantly changing, while numerous bars were formed, very seriously interfering with navigation. Previous to the commencement of these improvements the river at this point was frequently unnavigable for vessels of more than 4½ feet draught, while now, at the low water stage, it is navigable for vessels drawing 8½ to 9 feet. The work has been substantially completed about three years, requiring only slight repairs from year to year, while the natural current is evidently wearing the channel steadily deeper and making changes therein less likely to occur hereafter.

The principal form of protection for the banks shown in our views consists in firmly anchoring mats of light timber and brush, to extend from below to quite high water mark, these mats being connected, by the manner in which they are woven on board and moved to place, to form a continuous protection to the portion of the bank they cover. A break anywhere in this mat covering would soon be found by the current when the water rises, and great care is, therefore, taken to make this matting cover continuous before the weight of stone or other material which is to hold it down is put in place.

The general manner of conducting operations is pretty thoroughly indicated by our illustrations, although the details vary in different localities. The hydraulic grading shown in Fig. 1, and one manner of sinking mat by pumping sand upon it, as shown in Fig. 3, indicate some of the recent improvements in methods of conducting the work, the whole plant for carrying on which is owned by the government. Fig. 2 shows the weaving of the mat in place upon the bank. Fig. 5 shows the weaving barge, with a load of brush in convenient proximity thereto, the weaving being done on a special frame set at an angle against the bank, the mat as made, shown in Fig. 4, being moved down into position on a bed formed by longitudinal timbers and stakes, the mat being afterward ballasted by loose stones and the pumping of sand upon it. The progress of this ballasting and placing of the mat is shown in Figs. 5 and 6.

The results of the work done at this point on the Mississippi have been so satisfactory as to lead to the more steady prosecution of similar plans for improving other sections of the river. The point at which these improvements were made was notoriously the worst one below Cairo, yet during last year, a season of very low water, no trouble was found in navigating this section. The high water of the year was above the thirty-foot stage for fifteen days, yet all overflow was prevented for a distance of nearly thirty miles. In the similar work done for the protection of Memphis harbor, the success has been equally pronounced. This work was not completed until the fall of 1887, and much of that which was done at first proved inefficient, but with the later methods adopted it is said that not a stick or a stone can be seen to be displaced, and not a foot of earth has been lost behind the revetment. So great is the confidence of those doing business there in the permanence of the water front as now established, that manufacturing and warehousing concerns have lately erected extensive and costly additions to their buildings on the

river bank, and the elevator and compress companies have built out on piles driven through the revetment, so as to recover a considerable portion of their lost space.

The cost of such work has been greatly reduced since the government commenced these improvements. What originally involved an expenditure of some \$30 per foot of bank was, in the last portion of the work, done for about \$12 per foot of bank. The cost of a subaqueous mat 150 feet wide constitutes about one-half the expense, but some of the mats used have been 250 to 300 feet wide. This is said to be the heaviest and most costly work of its kind ever put down, and the engineers claim that it will certainly protect any alluvial bank on the Mississippi River.

The work above described has been ably conducted under the supervision of Capt. Smith S. Leach and Capt. Wm. T. Russell, of the corps of engineers, U. S. army.

The Mississippi River Commission consists of Col. C. B. Comstock, Lieut. Charles R. Suter, and Maj. O. H. Ernst, of the U. S. Engineer Corps; Mr. Henry Mitchell, of the Coast and Geodetic Survey; Messrs. B. M. Harrod and S. W. Ferguson, civil engineers, and Mr. Robert S. Taylor.

Notes on *Teles Polyphemus*.

I collected two cocoons of this beautiful moth last fall. As they happened to be free from parasites, I was fortunate enough to observe the very interesting manner in which they came forth. April 30, about noon, the end of one cocoon was noticed to be soft and moist. Every minute or two the moth could be seen struggling to push its way through the softened cocoon. In about ten minutes from the time it was first noticed, the moth burst through, and, drawing its enormous body out, it began to run hurriedly around to find a place suitable for the position necessary to the growth of its wings. Climbing up the window frame, it attached itself to the wood by the sharp hooks on each foot, and there, with its body hanging downward, it waited for its wings to grow.

When it first came forth, its wings, were less than an inch in length, but they grew so rapidly that in fifteen minutes they were longer than its body; in twenty minutes they were of full length, but were still very soft.

The reason for the insect being so anxious to get the right position immediately after emerging from the cocoon is that if the wings are cramped or held in a wrong position, they harden thus and prevent it from flying.

The other moth came forth about half an hour after the first one. I covered it with a low glass cover for about fifteen minutes. It kept running around and turning over on its back in the vain attempt to assume an upright position. Removing the cover, I allowed it to climb an upright stick, when it immediately became quiet. Its wings, which had been slowly expanding, now began to develop as rapidly as in the first one, but its forced imprisonment had ruined its beauty. The hind wings were creased and crumpled so that it could not fly.

During the development of the wings I could see the pulsations in the body as the blood was forced into the tubes of the wings. WALTER A. LYNN.

Silo Presses and Ensilage.

The following is a description of a silo press erected at the Agricultural Experiment Station at Minneapolis, Minn. There are two presses located in the barn, each 16 ft. square and 21 ft. in height. They are so arranged that the top of each is on a level with the thrashing floor of the barn and the bottom is on a level with the basement stables, thus facilitating the feeding of the animals. To a height of 11 feet are walls of stone, 18 inches in thickness, above which the walls are wood. The bed is of concrete, composed of one part Louisville cement, two parts sand, with enough water and gravel added to make a stiff mortar. The floor has a slope of one inch to the center, where is located a well 3 feet in diameter and 4 feet deep, filled with gravel and stones, the bottom being left open. The walls are boarded up with matched flooring, a space being left between that and the main wall for ventilation. Two thicknesses of tarred paper is tacked on to this lining, and over the paper another covering of matched flooring nailed on vertically. This gives an air-tight, water-tight, and frost-proof silo, and one which is constructed to facilitate filling and feeding, and is admirably adapted for preserving the ensilage.

For the greater preservation of the wood, the partition walls are only carried within an inch and a half of the floor, and before filling the silo a strip of tarred paper is folded and nailed to a strip of board at the bottom, one-half of the tarred paper lying on the floor and being held firmly in place when the silo is filled by the ensilage. This makes an air-tight joint when the press is filled, and when it is empty the paper is raised or removed, and a free circulation of air is established, which purifies the chamber and dries and preserves the board partitions. This method of con-

struction, with the use of an air chamber, has proved satisfactory, and in spite of very severe winters has prevented the contents from freezing.

It is well to bear in mind in constructing a silo that it is only a preserving can on a large scale, and the same rules should be observed in both cases. The timber used may be rough, but it is necessary to make a liberal use of tarred building paper. The walls of the silo must always be vertical, that the contents may readily settle by gravity. They must also be strong enough to withstand a strong lateral pressure. It is absolutely essential that the bottoms and walls be air and water tight. It is preferable to divide the space intended for the silo into three equal compartments, so that they may be filled alternately to a depth of four or five feet and then allowed to ferment, the heat rising to 100 or 140 degrees before the section is again filled. The silo in practical use should not be too large, as it is advantageous to remove an inch or more from the surface daily, the ensilage thus being always found sweet and pure and before any mould can gather thereon.

The report of the Department of Agriculture also issues the following directions on the preparation and treatment of ensilage: Although any plant or vegetable fit for cattle food when green may be preserved for an indefinite period in the silo, Indian corn is considered the cheapest and best for ensilage. Such varieties of the corn should be planted as will reach maturity in an ordinary season in the section of the country in which it is to be raised. Plant in rows wide enough to admit of easy cultivation and just thick enough to allow each stalk to form a well developed ear. The crop should be gathered when the grain is fully formed, but in the doughy state, at which period it contains the greatest amount of digestible matter. Corn partially dried is equally desirable for the silo. The corn should be cut in about one-half inch lengths.

In filling the silo, care should be taken to spread it evenly as put in, to pack the corners and sides firmly, to cover the top with a layer of boards or plank. Spread over this a double layer of tarred paper, and then a layer of rough boards, and on the whole a moderate weight of from fifty to one hundred pounds to the square foot. The weighting material may be anything convenient, sand, gravel, or dirt in barrels, stone, fire wood, farm implements, for storage and the like.

Pits should not be opened until fermentation has ceased and the mass has cooled, which will be in from six to eight weeks from the time of filling.

In feeding from the silo, it is better to feed day by day from the top in uniform layers, rather than from top to bottom, as by this method the surface is not exposed long enough to the air to become sour.

Ensilage can be grown and preserved much cheaper than root crops, by the ordinary farmer, and will successfully take their place in feeding value.

Corn ensilage is not a complete feeding ration, as it is deficient in protein, and this must be supplied by some by-fodder, as bran, shorts, or oil cake.

The best results of feeding ensilage are obtained by using it in combination with dry fodder, the best of which is clover hay.

Ensilage furnishes a succulent and easily digested food, greatly relished by all animals during the winter months, when their diet would otherwise be confined to a regime of dry provender. The cheapness and ease with which the silo can be constructed, the certainty with which, when properly constructed, it will preserve the feed from injury, the low cost of raising the crop, and the great yield per acre as compared with hay crops, and the value as a cattle food, render this the cheapest provender a stockman can raise.

Such are the directions given by this report and such are the deductions arrived at.

The Biggest Girders Yet.

In the new addition to the American Museum of Natural History will be used the largest box or riveted girders ever used in the construction of a building, says the *New York Times*. These girders were designed by J. Cleveland Cady, the architect, to support the floors and partitions, and thus obviate the use of pillars or columns, the object being to give unobstructed floor room for the display of specimens. There are twenty-eight of these girders, measuring about sixty-two feet in length, and weighing 40,000 pounds each. They were landed on the North River front of the city in the neighborhood of Fiftieth Street, and the possibilities of modern trucking have been taxed in vain to transport them to their destination at Manhattan Square.

The longest and strongest trucks to be found were brought into requisition, and with twelve horses harnessed to each truck the attempt began. One truck collapsed in Fifty-seventh Street near Tenth Avenue, another at Seventy-seventh Street and Ninth Avenue, while a third, which was fortunate enough to reach the square without mishap, buried its wheels to their hubs and stuck fast as soon as it left the pavement of the street. The contractors have therefore found it necessary to construct a tramway across the square from Ninth Avenue to the building for the transportation of the girders.

THE JOHNSTOWN DISASTER.

In our last issue we illustrated some of the features of the Johnstown disaster from sketches made on the spot by our special artist. These showed very clearly the general aspect of the scene after the water had done its work. These views we now supplement by reproductions of photographs of characteristic scenes which emphasize the resistless force of the torrent that swept down the Conemaugh valley. It is to be hoped that a tangible theory will be formulated by the committee of the American Society of Civil Engineers appointed to investigate the occurrence. It consists of the following members: J. Max Becker, president; James B. Francis, Wm. E. Worthen, ex-presidents; and A. Fteley. The latter gentleman is at present chief engineer of the new aqueduct. The society has delegated this committee to visit the scene of the disaster and report upon it.

The lesson, after all, seems to be the old one so often taught by engineering disasters, the necessity of allowing a large factor of safety. The late Alexander Holley spoke in his epigrammatic way of the factor of ignor-

engineer in charge of the work. It was built of earth well rammed and watered and laid in horizontal layers. The remains of this structural feature are present in the step-like contour of the break. It was covered with rough stone on both faces. The five pipes that passed through its base were used for running off the water when it was required to feed the upper levels of the canal. They were not put in place to be used in an emergency only, but were part of the regular feeding apparatus of the canal system. When opened, the water ran down the South Fork and Little Conemaugh to Johnstown, where it entered the canal. About 1858 the use of the dam was abandoned by the State, and four years later the first break occurred. It was in July, 1862. The culvert through which the iron pipes were carried proved defective, and a quantity of water ran out beneath the dam. Little damage to outside property was done, but the dam was undermined and injured, and a depression was formed in its top. Incidentally, of course, the hard rammed layers were disturbed and disintegrated. After this accident the dam was left to itself with about ten feet of water in it un-

radius of 213 feet; 360 feet long on crest. Impounds 6,000,000,000 gallons.


Dam at Oakland, Cal.—Earth, 80 feet high, 300 feet long, and 310 feet wide at base. Impounds 5,000,000,000 gallons.

Dam at Redland, Cal.—Bear Valley dam.—Granite masonry in cement; 64 feet high, 300 feet long, 20 feet thick at base, and 1½ feet at top. Curved type, with radius of 335 feet. Impounds 10,000,000,000 gallons.

Dam at San Mateo, Cal.—This is to be 170 feet high, 700 feet long, 176 feet thick at base and 20 feet thick on top. It is to be in Portland cement concrete masonry, and is to have a capacity of 32,000,000,000 gallons. It has only recently been begun.

The Quaker Bridge dam will, of course, dwarf all these. It will be 265 feet high from bed rock, with a base 216 feet wide. Ninety-nine feet of its base will be beneath the lake bottom, so that the visible masonry will rise 166 feet. It will impound about 37,500,000,000 gallons of water, forming a lake sixteen miles long.

Apprehensions have been expressed as to the effects of its breaking down. Should such an accident occur,

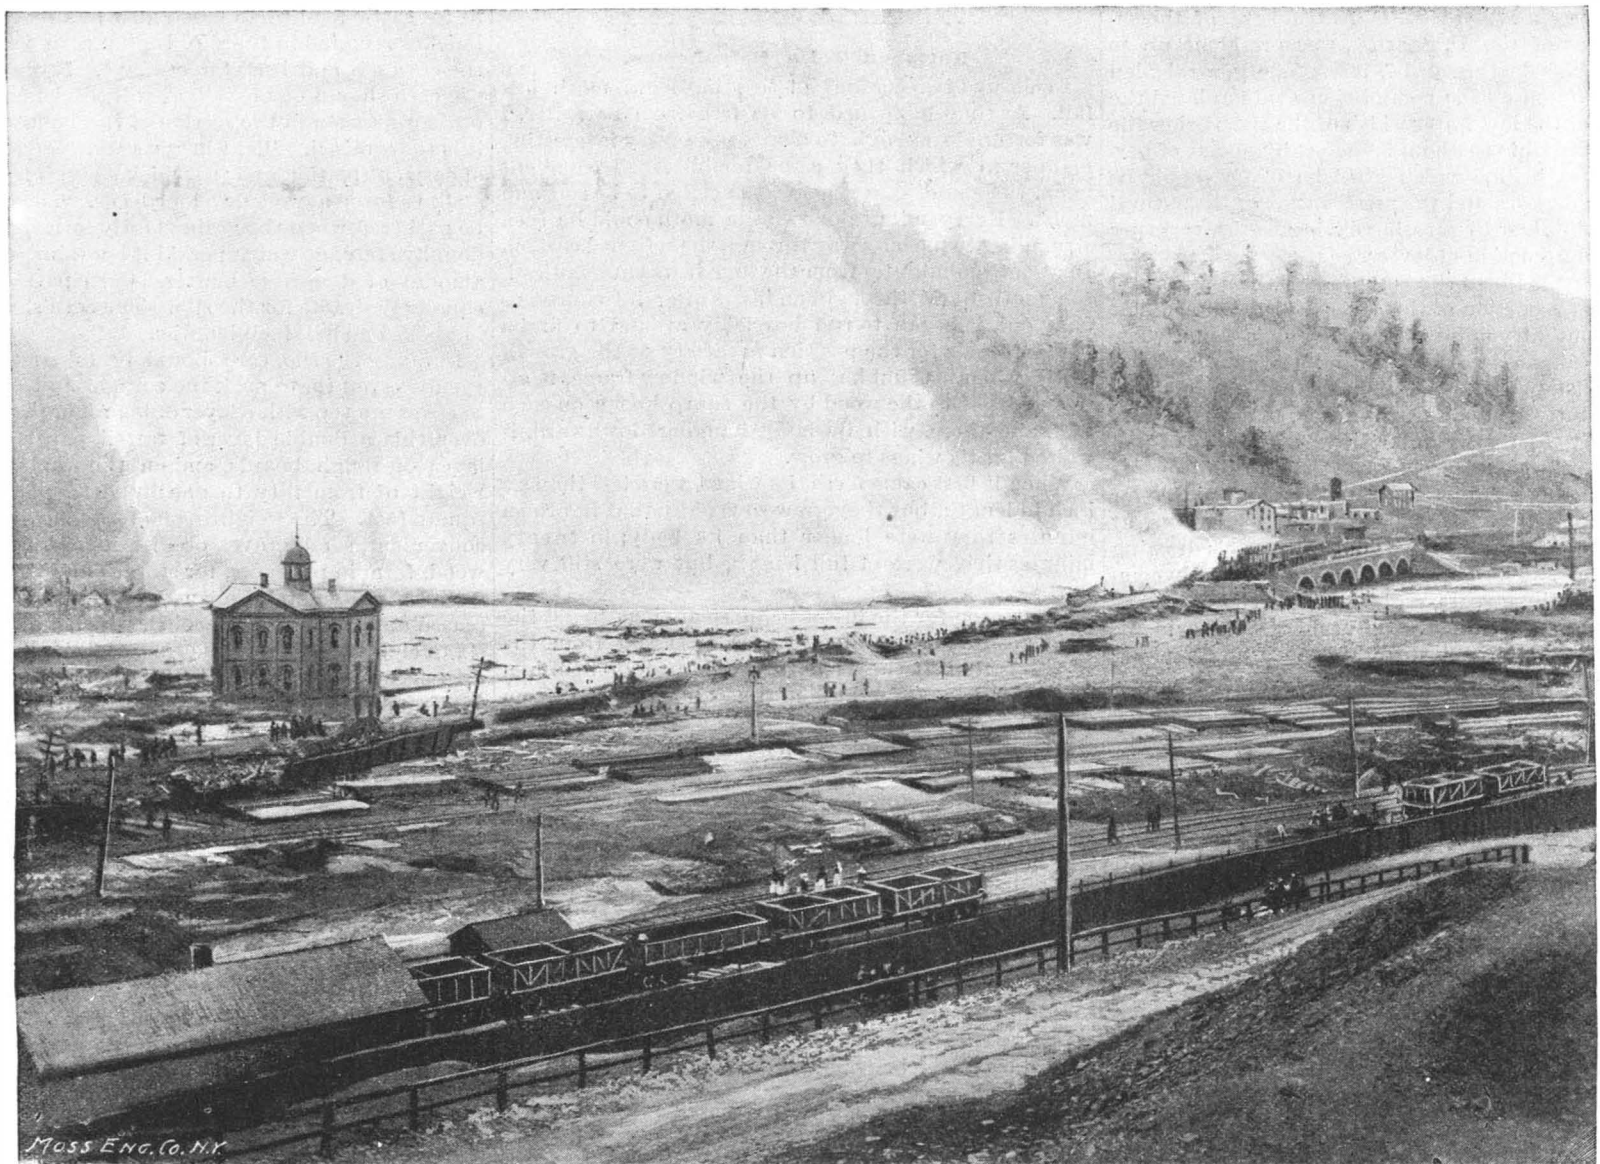

THE JOHNSTOWN DISASTER—THE SCHOOL HOUSE, THE ONLY BUILDING LEFT IN THE VICINITY. THE RAILWAY BRIDGE AND BURNING DEBRIS DRIVEN AGAINST IT.—(From a Photograph.)

ance; this factor in the case of the dam and lake overflow was far too small.

The concurrent force of all the investigations made by engineers, including those specially detailed by our contemporary the *Engineering News*, is as follows: The spillway of the dam for nine years proved adequate for the overflow. On the day of the disaster its capacity was overtaxed. The water rose in the dam far above the level of its bottom. The pipes at the base were closed permanently. Had they been open, it has been calculated that they would not have sufficiently relieved the extra flood to have prevented the water from rising to the top of the dam. Moreover, the spillway was obstructed by a bridge, fish screen, and other obstacles which still further interfered with the outflow. The water began to pour over the crest, probably lowest at the center. The water pouring over the crest cut away the earthwork with greater rapidity, owing to its inferior construction. At every instant gaining strength, the great crevasse was soon made, and the lake emptied itself, with the disastrous results known to all. Had the spillway been of adequate size, the dam would have remained intact, and no life would have been lost.

The dam was originally built under the supervision of Mr. Wm. E. Morris, now deceased, who was principal assistant engineer of the Pennsylvania State canals. He had direct superintendence of the western division. Gen. Jas. N. Moorhead, also deceased, was constructing

til 1875. In May of this year it was bought by a private individual, who four years later sold it to three gentlemen, the organizers of the South Fork Hunting and Fishing Club. The dam was repaired, most of the work being executed in 1880. The five pipes at the base were permanently closed, and for nine years all went well. Eventually a heavy rainfall overtaxed the structure, and the great disaster occurred.

The dam cost, originally, \$240,000. It covered an area of about 500 acres, impounding the water from fifty or sixty square miles of watershed. It was 72 feet high and 900 feet long, and formed a lake that held 480,000,000 cubic feet of water, or about 3,600,000,000 gallons. It has been spoken of as the largest artificial lake in the United States, but it was exceeded in size by the reservoirs formed by the following dams:

Croton dam, in New York—434 feet long, 284 feet being of masonry and the remainder of earth. The height is about 40 feet. The foundation of the dam consists of two lines of stone-filled cribs, with 10 feet of concrete between them. The down-stream face is curved, and faced with granite. A small crib dam 300 feet below forms a basin, which serves as a cushion to break the fall of the water. The back of the dam is filled with earth. Impounds 5,000,000,000 gallons.

Sweet Water dam, in National, Cal.—Rubble masonry in Portland cement; 98½ feet high, 46 feet thick at bottom and 12 feet at top. Of curved type, with

the present Croton dam, which will undoubtedly remain intact and submerged, will lessen, to some extent, the flood. The valley between the Quaker Bridge site and the Hudson River is only two miles long, and has no settlement of any importance in it.

At Johnstown the work of re-establishing the city has been actively carried on. Adjutant-General Hastings remains in charge of the work. A number of soldiers are encamped there for the preservation of order.

Work upon the gorge is still in progress. Stationary engines are in use to draw out the logs and heavier masses, large blasts of dynamite are applied to loosen the debris, and experienced loggers or raftsmen have proved of much help from their skill in handling floating timber. Corpses in an advanced state of decomposition are still found, over thirty having been discovered upon a single day last week. As fast as the remains of animals are extricated, they are burned upon the shores. A number of steam fire engines are on the ground, and have been utilized in pumping out the cellars.

The Pennsylvania railroad had about 3 miles of its roadbed washed away or buried beneath the debris. On the 13th of June, two weeks after the disaster, the line was again open and trains were running through to Pittsburgh and the West. The engines carried away in the destruction of the Conemaugh round house were consolidation engines, and very heavy.

None were carried less than 100 feet, some were transported 1,200 feet, and perhaps farther. Nearly twenty engines were scattered thus in all directions. Mr. McHenry, of the Cambria Iron Works, states that he saw an engine carried past that for an instant appeared to be floating on the surface of the water thirty feet above the ground. This gives an idea of the power of the water moving down the valley at

such high velocity. For the excellent photographs herewith reproduced of the scene of the late disaster, we are indebted to the Dabbs photographic establishment, of Pittsburg, Pa.

The Polariscope as a Thermometer.

The polariscope has recently been applied in France to determining the temperature of incandescent iron

and other metals. The color of a glowing mass of metal varies according to its temperature, and a ray of the light when polarized is rotated by a plate of quartz to a degree dependent upon the color. The degree of rotation is measured by the polariscope, and an empirical scale of temperature is thus obtained, which has been found very useful and reliable in metallurgical operations.



THE JOHNSTOWN DISASTER—VIEW ON ELM STREET.—[From a photograph.]



THE JOHNSTOWN DISASTER—VIEW ON MAIN STREET.—[From a photograph.]

Granite.

The essential components of the true granites are quartz and potash feldspar. Although the essential minerals are but two in number, the rocks are rendered complex by the presence of numerous accessories which essentially modify the appearances of the rocks, and those properties render them of importance as building stones. These additional minerals are either present in such amount as to be conspicuous and to exercise an influence upon the appearance and structure of the rock, when they are called characterizing accessories, or they are present in such small amount as to be invisible to the naked eye, when they are called microscopic accessories. If all the minerals which by careful examination have been found in granites should be considered as constituents of the rock, then the latter would appear as very complex. At least two-thirds of all the known elements exist in granitic rocks, and the number of minerals that are liable to be present in special cases is very large.

The following list does not include all of those minerals which have been identified in this rock, for many have been found under circumstances which are so isolated that their occurrence is entirely exceptional. All of the minerals in this list are liable to be found at any time, and may therefore be considered as common constituents of the rock, although the presence of them all together is not to be expected, and some of them may be present in such minute amount as to be of no practical importance. Any one of them, save the two essential constituents mentioned above, may be absent from an individual specimen or from a given locality; and any one may be present in the specimens from a given locality in such amount as to give a character to the rock. Thus almost any one of those minerals which are given as microscopic accessories may assume the character of a characterizing accessory; this is especially true of the iron oxides, which sometimes are present in such amounts as to become characteristic:

Essential:	Microscopic accessories:
Quartz.	Sphene.
Feldspar.	Zircon.
Orthoclase.	Garnet.
Microcline.	Danailite.
Albite.	Rutile.
Oligoclase.	Apatite.
Labradorite.	Pyrite.
	Pyrrhotite.
	Magnetite.
	Hematite.
	Titanic iron.
Characterizing accessories:	Decomposition products:
Mica.	Chlorite.
Muscovite.	Epidote.
Biotite.	Uralite.
Phlogopite.	Kaolin.
Lepidolite.	Iron oxides.
Hornblende.	Calcite.
Pyroxene.	Muscovite.
Epidote.	
Chlorite.	
Tourmaline.	
Acmite.	
	Inlosures in cavities:
	Water.
	Carbon dioxide.
	Sodium chloride (salt).
	Potassium chloride.

—Prof. G. P. Merrill, in Gov. Report.

The Elizabeth Thompson Science Fund.

The Elizabeth Thompson science fund, which has been established by Mrs. Elizabeth Thompson, of Stamford, Conn., "for the advancement and prosecution of scientific research in its broadest sense," now amounts to twenty-five thousand dollars. As accumulated income is again available, the trustees desire to receive applications for appropriations in aid of scientific work. This endowment is not for the benefit of any one department of science, but it is the intention of the trustees to give the preference to those investigations which cannot otherwise be provided for, which have for their object the advancement of human knowledge or the benefit of mankind in general, rather than to researches directed to the solution of questions of merely local importance. Applications for assistance from this fund, in order to receive consideration, must be accompanied by full information, especially in regard to the following points:

1. Precise amount required.
2. Exact nature of the investigation proposed.
3. Conditions under which the research is to be prosecuted.
4. Manner in which the appropriation asked for is to be expended.

All applications should be forwarded to the secretary of the board of trustees, Dr. C. S. Minot, Harvard Medical School, Boston, Mass., U. S. A. It is intended to make new grants at the end of 1889. The trustees are disinclined, for the present, to make any grant exceeding five hundred dollars. Preference will be given to applications for smaller amounts. The following is the list of grants made: \$200 to the New England Meteorological Society, for investigation of cyclonic movements in New England; \$150 to Samuel Rideal, Esq., of University College, London, England, for investigations on the absorption of heat by odorous gases; \$75 to H. M. Howe, Esq., of Boston, Mass., for the investigation of fusible slags of copper and lead smelting; \$500 to Professor J. Rosenthal, of Erlangen, Germany,

for investigations on animal heat in health and disease; \$50 to Joseph Jastrow, Esq., of the Johns Hopkins University, Baltimore, Md., for investigations on the laws of psycho-physics; \$200 to the Natural History Society of Montreal for the investigation of underground temperatures; \$210 to Messrs. T. Elster and H. Geitel, of Wolfenbittel, Germany, for researches on the electrization of gases by glowing bodies; \$500 to Professor E. D. Cope, of Philadelphia, Pa., to assist in the preparation of his monograph on American fossil vertebrates; \$125 to E. E. Prince, Esq., of St. Andrews, Scotland, for researches on the development and morphology of the limbs of teleosts; \$250 to Herbert Tomlinson, Esq., of University College, England, for researches on the effects of stress and strain on the physical properties of matter; \$200 to Professor Luigi Palmieri, of Naples, Italy, for the construction of an apparatus to be used in researches on atmospheric electricity; \$200 to William H. Edwards, Esq., of Coalburg, W. Va., to assist the publication of his work on the butterflies of North America; \$150 to the New England Meteorological Society, for the investigation of cyclonic phenomena in New England; \$25 to Professor A. F. Marion, for researches on the fauna of brackish waters; \$300 to Professor Carl Ludwig, for researches on muscular contraction, to be carried on under his direction by Dr. Paul Starke; \$200 to Dr. Paul C. Freer, for the investigation of the chemical constitution of graphitic acid; \$300 to Dr. G. Muller, for experiments on the resorption of light by the earth's atmosphere; \$300 to Professor Gerhard Kruss, for the investigation of the elementary constitution of erbium and didymium; \$50 to Dr. F. L. Hoorweg, for the investigation of the manner and velocity with which magnetism is propagated along an iron bar; \$150 to Mr. William H. Edwards, to assist the publication of his work on North American butterflies.

The Forms of Leaves and their Uses.

Even the most cursory observer of vegetable life must have been often struck with the various forms of leaves. Why they should be so variously formed does not, however, often suggest itself, though there is a reason for the special shape and texture of almost every leaf in existence. Plants, such as grasses, daffodils, and others which usually grow in clusters, have generally narrow leaves growing upright, so as not to overshadow one another. Other plants, of isolated habits, have an arrangement of foliage which secures to themselves the space of ground necessary for their development. The daisy, dandelion, or shepherd's purse—which may mostly be seen in pastures—are examples of this. A circle of broad leaves pressed against the ground, forming what is known as a rosette growth, effectually bars the approach of any other plant and keeps clear from all other roots the space of ground necessary to its own nutriment. Floating leaves, and leaves of marsh plants, are usually of simple outline, for, having few competitors, they are not liable to get in one another's light. Submerged plants have mostly leaves of narrow segments—the reason for which is not very well understood, though it is assumed by naturalists that it is for the purpose of exposing as large a surface as possible, in order to extract the minute proportion of carbonic acid dissolved in a vast bulk of water.

Leaves on the boughs of trees are often much divided, so as to fold easily, to prevent their being rent and torn by high winds, while the glossy surface of evergreens is intended to throw off rain and dew, which might freeze on them, and so cause injury to the tissues within. But the hairs on the surface of leaves are perhaps the most interesting study of all. With the aid of a microscope, the beautiful and systematic arrangement of these can be easily discerned, and their uses understood. On many plants there are glandular hairs, to catch or deter small creeping insects; on others there are hairs set so as to act as effectively against young animals as a spike palisade against obtrusive boys; on others, hairs which arrest the drops of moisture and force them down the leaf-stalk, to moisten the earth about the roots; while others are protected by a series of poisoned stings. The ordinary nettle is an example of this, and the beauty and ingenuity of its mechanism is truly wonderful. Each nettle hair is armed with a brittle and pointed siliceous cap, which breaks off in the wound; and the poison is then able to flow out through a tubular hair, from a reservoir at its base. There is scarcely a form of leaf but is specially modified by nature for some particular purpose, and the discovery of this purpose is a source of very pleasant and profitable study to young naturalists.—*Horticultural Times*.

The Manchester Ship Canal.

Some interesting statistics were lately given by Mr. Alderman Bailey, one of the directors, with reference to the progress of this work. He stated that 15½ million tons of earth and rock had been excavated, and that 28 million tons more remained to be removed. It was anticipated that the work would be finished in two years from 1st of January next. There were on the works 183 pumping engines, 82 steam navvies, 5,000 wagons, 158 locomotives, and 116 steam cranes, and in

a few months 15,000 men would be employed. He further gave some particulars as to the cost of haulage of one ton, which was stated to be 6d. per mile on the highways, 2d. on the railways, 1-66d. per mile on the Leeds and Liverpool Canal, 1-116d. per mile on the Aire and Calder Navigation, and between New York and Liverpool about 1-300d. per mile.

Natural Gas in the Manufacture of Steel.

The process of James J. McTighe, of Pittsburg, for manufacturing steel is applicable to the production of the various grades thereof, from the soft kinds used for sheets and rails to that employed in the production of tools, needles, surgical instruments, etc.

He describes the process as follows: It has commonly been held that the brittleness of iron or steely irons is due, according as the iron is hot or cold, to the presence of an excess of sulphur or phosphorus. Discarding this theory, and assuming that the "cold-shortness" or "red-shortness" of iron or steel is due principally to an admixture of oxide of iron, I have devised a new method or process of manufacturing carburized iron, according to which, even though both sulphur and phosphorus be in excess in the metal, it is exceedingly ductile when of the soft variety and having the qualities demanded in steel intended for widely different purposes.

Hitherto in the manufacture of ordinary steel of low grades—such, for instance, as is used for rails, boiler plate, etc.—it has been customary to desiliconize and decarburize molten cast iron by blowing air over or through it. It is an acknowledged fact that this air leaves an oxide of iron mixed with the mass.

My invention has for its object to rid the entire mass of iron of all this injurious oxide as well as to recarburize it to the required degree, as also to purify it by the extraction of phosphorus, sulphur, etc.; and to these ends my invention consists in the combination of two processes—the one being the treatment of any kind of molten ferric compound, usually called "cast iron," by air or oxygen for the purpose of desiliconizing, decarburizing, and oxidizing the other being the treatment of the same after the first step by commercial marsh gas, commonly known as "natural gas."

The first process need not be described, as it is practiced now in a variety of ways, and is well known to commerce as the "Bessemer" or "Siemens-Martin" method.

The second process consists in forcing natural gas through or over the bath of molten iron produced by the first process. The rationale of this second process is as follows: The gas disassociates the instant it comes in contact with the molten iron, as it always does in the presence of great heat, the carbon and hydrogen both assuming the nascent state. Carbon having in the presence of heat a great affinity for oxygen, deoxidizes the oxide of iron existing in the mass, thus producing a certain quantity of heat calculated to keep the mass in a molten condition. Hydrogen, on account of a similar affinity, assists in this reaction and result, and the twofold product—carbonic oxide or acid and hydric oxide—passes off as waste, the developed heat effectually preventing the chilling of the mass in the converting vessel. Simultaneously a further quantity of nascent hydrogen combines with portions of the sulphur and phosphorus, and forms, respectively, sulphureted and phosphureted hydrogen, which pass off as vapors, thus further purifying the product. It is also probable that a portion of the nascent carbon will unite with some of the sulphur to form bisulphide of carbon—another vapor that is at once carried off. A certain quantity of the nascent carbon unites with the molten mass of iron to form steel, which will be of high or low grade, according to the duration of the required described reaction.

The special features in the use of natural gas are:

First, its entire freedom from elements which might prove injurious to the steel, especially sulphur and phosphorus. This feature is not found in any gas made from any kind of coal.

Secondly, in the comparatively low amount of carbon it contains, it being almost entirely marsh gas.

All other gases made from petroleum, oils, fat, etc., are very rich in carbon. When such carbons are brought into contact with molten iron, the amount of carbon disassociated by heat is so great as to chill the mass at once or leave flakes of uncombined carbon distributed throughout the mass, which, when the iron is rolled into thin sheets, appear on the surface and effectually prevent its being properly galvanized or tinned. The percentage of nitrogen and free hydrogen shown by some analyses to be in natural gas obviously diminishes the risk of producing such carbon flake.

By the use of natural gas a practical and cheap substitute is obtained in place of the expensive spiegel iron heretofore adopted, and a fine quality of excellent steel of any desired grade is obtained economically and commercially, the same furnace producing, as desired, rails or plate, or sheet or razor, or wire, or cast or malleable steel, a result heretofore never hoped for. These various grades of steel will follow the varying amounts of carbon allowed to combine with the molten iron, and they can be in practice regulated with the scientific precision of chemistry.

RECENTLY PATENTED INVENTIONS.

Railway Appliances.

CAR AXLE BOX.—Edward Leslie, Orangeville, Ontario, Canada. The bearing herein provided for is adapted for the standard box, the angular motion of the axle being allowed for, while a narrow bearing brass can be used, which is properly supported at the upper part, a flat key fitting into the casing provided with a central aperture, while an intermediate plate is held on the under side of the key with a circular offset fitting into the aperture of the key.

CAR PLATFORM.—Robert S. C. Fuller, New York City. An auxiliary platform, capable of independent movement, is pivoted on the rigid platform of the car, whereby, when the cars are coupled, the platform of one will meet that of the opposing car, the platforms remaining in contact throughout their width irrespective of the curves of the road, while a gate folding at the side of the car may be opened to extend from one car to the other parallel with the outer sill of the platform.

CAR PUSHER.—Joseph C. Chrisman, Sewell Depot, West Va. This device is intended especially for pushing cars in coal mines, as well as for other uses, and has a base formed of two foot sections adapted to slip in one direction along the rail, and to clamp against any reverse movement, a slide bar being connected with one of the sections and sliding through the other, with lever connections between the latter section and the slide bar and a push bar or rod.

TRACK PLOW.—Edward Leslie, Orangeville, Ontario, Canada. This is an ice or snow plow designed to loosen any hardened snow or ice immediately next to the track, and having a flanger mechanism to remove snow or ice in proximity to the inside of the rail and discharge it a sufficient distance from the track to prevent its falling back.

Electrical.

BRUSH HOLDER FOR DYNAMOS.—Walter S. Bishop, New Haven, Conn. This is a simple and efficient device for holding the brush in the position of use with a light and uniform pressure, the brush being rendered adjustable in the holder by a positive screw movement, the brush-holding arm being pushed forward into contact with the commutator cylinder by a spiral spring, while there is an adjusting screw for moving the brush backward and forward through the brush socket.

ELECTRICALLY CONTROLLED ENGINE.—James E. Byrne, Brooklyn, N. Y. This invention relates to a hydraulic engine operating in connection with sheaves and cables, the latter attached to a car or cage to move it up and down, and provides means whereby the controlling valve is operated by electricity from the car instead of by hand power, and also for automatically reversing the car switch when the car reaches its upper or lower limits of travel.

Mechanical.

ANTI-FRICTION BEARING.—Bethuel G. and George H. Handy, Monroe, N. Y. This is a roller bushing for sheaves in which there is a rotary tubular box within an outer casing, and a series of rollers journaled in the box parallel with its axis, the faces of the rollers contacting with the inner side of the casing, and there being a space between the outer surface of the box and the rollers to prevent frictional contact.

PIPE TESTING MACHINE.—Michael Sexton, New York City. This invention provides for the use at each end of the pipe to be tested of a frame carrying a clamp screw with a packed head, one of the two clamp heads being provided with a testing fluid inlet, whereby water, steam, air, or other fluid may be forced into the pipe from a compressing apparatus, at any desired pressure, to discover sand or blow holes, splits, etc.

WATER WHEEL.—James T. Rohm, Locust Grove, Pa. Mounted in a closed casing is an upper horizontal rimless water wheel, having inclined buckets, and a lower horizontal water wheel having oppositely inclined buckets, with a surrounding rim extending upwardly and inclosing the other wheel, the opposite rotary motion of the two wheels being transmitted in one direction to a gear wheel.

LEVER FOR LOOMS.—Joseph A. Evans, Philadelphia, Pa. This is a shuttle-box-operating lever designed to improve the box lever of a power loom adapted for weaving fancy fabrics by making the lever in two parts and jointing it to work as freely as a solid lever, yet yield at the center to permit both ends to go up, should the plunger be arrested in its upward movement from the anchor wings becoming locked.

SPRAY CYLINDER FOR PAPER MACHINES.—Granville D. Crance, Valatie, N. Y. This invention covers a spray cylinder cleaner in which the cylinder has an extension at one end and a discharge pipe at the other, a rod with a handle fitting in one end of the cylinder, while at the other end of the rod is a swab, which is to be reciprocated in the cylinder for readily cleaning it.

Agricultural.

DISK HARROW.—George T. Booth, Christchurch, New Zealand. This invention provides means for securing the disks more firmly on the bolt or axle, to prevent excessive wear and tear, and also to regulate the pressure of the disks on the soil, and so that the pressure may be transferred to the outer or inner end of the disk bar, while wheels and axles are provided, so that the disks may be carried well clear of the ground while traveling.

COTTON HARVESTER.—Richard H. Purnell, Rosedale, Miss. This is a machine for picking cotton from the rows of plants in the field, a principal object being to prevent the team from knocking out the ripe cotton, for which the picking box is made to

operate at two rows distant from the team, so that there will be between the team and the row of cotton being picked a row of picked plants, thus saving great waste.

HAY RAKE AND BALING PRESS.

John A. Hooton and Gilbert L. Wiard, Atkinson, Neb. This invention covers a combined machine of a hay rake and double baling press, with elevator, longitudinally extending baling boxes with alternately operating plungers, and a feeder delivering alternately into the boxes, taking up the hay from the swath, baling it, and dropping the finished bales in the field.

Miscellaneous.

STAMP CANCELER.—Benjamin Summers, Petersburg, Penn. This canceler has a main plate with a handle and parallel cheek pieces in combination with a tumbler, to which a rod is connected, blocks being held in ways between the cheek pieces and connected to the tumbler, whereby the down thrust of the handle will move the blocks in a straight line between the cheek pieces.

GRATE.—Salvatore J. Buzzini, New York City. This invention relates to grates for stoves, ranges, etc., the grates being made to reciprocate or shake preferably in straight horizontal directions to free the grate and fuel from ashes, and to swing to one side to dump the contents of the fire box, the invention covering various novel arrangements and combinations of parts.

COATING PAPER.—George Manahan and Henry Gade, New York City. This invention covers an apparatus for applying to one side of a web compositions of various kinds in a fluid form, provision being made for the required varying amount of the coating smearing surface, and the apparatus being mainly intended to be used in applying a preservative and weather proof composition to a web of paper for making sheathing or building paper.

SCIENTIFIC AMERICAN
BUILDING EDITION.

JUNE NUMBER.—(No. 44.)

TABLE OF CONTENTS.

1. Elegant plate in colors, showing elevation in perspective and floor plans of a field stone residence, costing about nine thousand five hundred dollars. Page of details, etc.
2. Plate in colors of a cottage costing three thousand two hundred dollars. Perspective elevation, floor plans and details.
3. Engraving of the new Federal building to be erected at Worcester, Mass. Cost two hundred and fifty thousand dollars.
4. A cottage of moderate cost lately erected at Bedford Park, New York. Perspective and floor plans.
5. Plans and perspective of a convenient stable erected at Bedford Park, N. Y.
6. A handsome residence lately erected at Chattanooga, Tenn., from designs by Blotherwick & Penn, architects. Cost ten thousand dollars complete. Plans and perspective elevation.
7. A residence at Florence, Northampton, Mass. Cost ten thousand dollars complete. Perspective and floor plans.
8. Engraving of a half-timbered house at Chester, England.
9. View and plans of a fine barn lately erected near Providence, R. I.
10. A modern residence at Belle Haven Park, Greenwich, Conn. Perspective and floor plans.
11. A handsome house in the colonial style lately erected at "Renolds Terrace," Orange, N. J., at a cost of fifteen thousand dollars complete. Chas. A. Gifford, of London, architect. Perspective elevation and floor plans.
12. A cottage at Bedford Park, New York. Cost eight thousand five hundred dollars. Plans and perspective.
13. Engravings of the great Eiffel tower at the French exhibition.
14. St. Cloud Presbyterian Church, Orange, N. J. Potter & Robertson, architects, New York. Perspective elevation and floor plan. Cost seven thousand five hundred dollars.
15. Miscellaneous Contents: Brick piers.—Home decorations.—Delights of color.—Foundations in alluvial deposits.—Portland cement and sea water.—The effect of moisture on wood.—The weeping larch, illustrated.—Nashville's estimating rules.—Selected lumber.—The science of dry rot.—Sewage a protection against the teredo.—Ornamental borders, with illustrations.—Hot air vs. steam.—The new Catholic cathedral at Pekin.—Advantage of sanitary measures.—Which are the hardwoods?—An ideal living room.—A water motor for elevators, illustrated.—Granite rust.—Ventilating grates, illustrated.—French building laws.—Mahogany.—Artistic wood work, with illustrations.—Stains for mortar and plaster.—An enduring tin roof.—Wood filling and finishing.—Shell fish marbles.—Fire-resisting ceilings.

The Scientific American Architects and Builders Edition is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural publication in the world. Sold by all newsdealers.

MUNN & CO., PUBLISHERS,
361 Broadway, New York.

Business and Personal.

The charge for insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

Patent No. 394,707, Dec., 1888, portable burglar, door, and window alarm, for sale as a whole. Moulds, pattern, tools, etc., are ready. Write to J. L. Mikich, Houston, Texas. Samples, 50 cents apiece.

Special facilities for manufacturing light machinery, hardware, and novelties. Stamping, presswork, punches, dies, and special tools. Correspondence invited. Rockaway Manuf. Co., Rockaway, N. J.

For the best Hoisting Engine for all kinds of work, address J. S. Mundy, Newark, N. J.

Guild & Garrison, Brooklyn, N. Y., manufacture steam pumps, vacuum pumps, vacuum apparatus, air pumps, acid blowers, filter press pumps, etc.

Engineers wanted to send their addresses and receive free a 25 cent book, "Hints and Suggestions for Steam Users." Lord & Co., 11 S. 9th St., Philadelphia, Pa.

For the latest improved diamond prospecting drills, address the M. C. Bullock Mfg. Co., Chicago, Ill.

Ball Engine.

Automatic cut-off. Ball Engine Co., Erie, Pa.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

The Holly Manufacturing Co., of Lockport, N. Y., will send their pamphlet, describing water works machinery, and containing reports of tests, on application.

Screw machines, milling machines, and drill presses. E. E. Garvin & Co., Laight and Canal Streets, New York.

Needle slot screens and all kinds of mining screens. Robert Aitchison Perforated Metal Co., Chicago, Ill.

Drop Forgings. Bronze Forgings. Upward of 3,000 different articles. Billings & Spencer Co., Hartford, Conn.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Investigate Edison's Recording Steam Gauges. Savecoal, etc. Write for pamphlet. J. B. Edson, 86 Liberty St., N. Y.

Friction Clutch Pulleys. The D. Frisbie Co., N. Y. city.

Veneer machines, with latest improvements. Farrel Fdry. and Mach. Co., Ansonia, Conn. Send for circular.

Tight and Slack Barrel Machinery a specialty. John Greenwood & Co., Rochester, N. Y. See illus. adv. p. 28.

Rotary veneer basket and fruit package machinery. L. E. Merritt Co., Lockport, N. Y.

Planing and Matching Machines. All kinds Wood Working Machinery. C. B. Rogers & Co., Norwich, Conn.

Rollstone variety lathe—bores, beads, and turns at the same time. Rollstone Machine Co., Fitchburg, Mass.

Manufacturers Wanted at Lyons, N. Y. 5 railroads, canal; low taxes, rents, fuel, and labor. Address Secretary Board of Trade.

Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

INDEX OF INVENTIONS

For which Letters Patent of the
United States were Granted

June 11, 1889,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Adding machine, D. E. Felt..... 405,024
Air cooling apparatus, J. L. Wood..... 405,064
Air engine, J. S. Baldwin..... 404,818
Animal trap, A. Brown..... 405,006
Anvil and swage, J. H. Urschel..... 405,191
Asbestos treating, B. E. Church..... 405,201
Assorting machine, Gooding & Ladd..... 404,904
Automatic sprinkler, J. Clapp..... 404,897
Axle box, car, E. Leslie..... 405,040
Back band pad, G. W. Moores..... 404,923
Bag. See Paper bag.
Bag lock, C. Reinisch..... 405,119
Baker's peel, G. A. Naumann..... 405,046
Baling press, F. W. Anderson..... 404,815
Baling press, J. H. Howard et al..... 404,972
Band cutter, C. H. Hill..... 404,840
Bar. See Binding bar. Exercising bar. Stretcher bar.
Battery. See Galvanic battery. Secondary battery.
Beach chair, C. E. Koechling..... 405,038
Bearing, anti-friction, B. G. & G. H. Handy..... 405,011
Bed pan, M. Riker..... 405,182
Bellows, O. Kullbom..... 405,103
Binder or file for documents, P. Garton et al..... 405,026
Binding bar, J. T. Richardson..... 404,895
Bit. See Drill bit.
Blind stop, M. B. Wesson..... 404,938
Boiler. See Steam boiler. Wash boiler.
Boiler, M. E. Irving..... 404,912
Boiler front and setting, H. L. Beach..... 404,821
Boiler stay, H. Schaubel..... 405,227
Boiler tube fastening, H. Schaubel..... 405,225
Boiler tubes, fastening, H. Schaubel..... 405,226
Bolster spring, H. Van Arsdale..... 405,192
Bolt and nut, A. M. Brainard..... 404,953
Bolt threading machine, A. Wood..... 405,236
Book blank, N. H. Baker..... 404,817
Boom pad, S. Wheeler..... 404,881
Bottle stopper, T. B. Howe..... 405,065
Box. See Axle box. Fruit box. Letter box.
Box binder, metallic, F. G. Johnson..... 404,842
Brake. See Carriage brake. Wagon brake.
Brakes, engineer's cock for air, G. A. Boyden..... 405,197
Brick burning, J. C. Anderson..... 405,066
Brick machine, B. Owen..... 404,857
Bridge spans, draw, M. H. Long..... 405,042

Bureau or similar article of manufacture, Katherman & Folk..... 405,166
Burner. See Gas burner. Hydrocarbon burner. Oil burner.
Button, P. A. Raymond..... 405,179
Cable grip, G. A. Carreras..... 405,145
Cable roads, slot rail for, M. M. Suppes..... 405,281
Calendar, C. K. Hamilton, Jr..... 405,160
Car coupling, R. J. Edwards..... 405,085
Car coupling, Greenway & Strickland..... 404,967
Car check, J. M. De Witt..... 404,901
Car gate, N. F. Mathewson..... 404,919
Car heating apparatus, J. F. McElroy..... 404,927
Car heating apparatus, P. L. McGovern..... 405,112
Car platform, railway, R. S. C. Fuller..... 405,025
Car pusher, J. C. Chrisman..... 405,012
Car replacer, R. W. Africa..... 405,143
Car stock, M. D. Moore..... 405,107
Car windows, smoke and dust fender for, Waller & Carlstedt..... 405,060
Cars, alarm signal for cable and electric railway, Pingst & Bemis..... 404,981
Cars, safety extinguishing attachment for heating and illuminating apparatus for railway, R. T. Smith..... 404,875
Cars, steam heating system for railway, J. F. McElroy..... 404,926
Carding machines, etc., cylinder for, G. O. Wickes..... 405,234
Carpet stretcher, Moylan & Griemsmann..... 405,171
Carpet sweeper, W. J. Drew..... 405,084
Carriage bow, G. L. Crandal..... 404,900
Carriage brake, baby, I. Levy..... 405,041
Carriage curtain knob, F. A. Neider..... 404,928
Carriages, prop block washer for, A. Searls..... 404,989
Carrier. See Cash carrier. Cotton carrier.
Cart, road, F. H. Boni..... 405,074
Cart, road, J. W. Coombe..... 405,081
Cart, spring, L. E. Walberg..... 405,193
Cartridge loader, A. Euston..... 405,152
Cartridge shells, device for uncapping and recapping, N. M. Muzzy..... 404,855
Case. See Latch case. Show case.
Cash carrier, W. H. Billing..... 404,887
Cash carrier, E. P. Zerbe..... 404,943
Cash carrier, Zerbe & Church..... 404,944
Cash carriers, adjustable curve for, F. S. Church..... 404,896
Cash register, W. C. McGill..... 405,111
Casting chill rings, apparatus for, H. Birkholz..... 404,898
Casting chill corrugated rollers, apparatus for, H. Birkholz..... 404,899
Casting machine, ingot, W. R. Hinsdale..... 404,900
Centering device, J. A. Palmer..... 404,856
Centrifugal separators, means for lubricating, F. Hart..... 405,212
Chair. See Beach chair. Folding chair. Opera chair.
Cherry stoner, P. H. Reibisch..... 405,118
Cigar wrapping and rolling machine, C. W. Bowman..... 405,073
Cleaner. See Grain cleaner.
Clock, electric alarm, B. Dubinski..... 405,206
Clock, electric alarm, W. E. Hadlock..... 404,906
Clock, electric self-winding, J. H. Gerry..... 405,089
Clock pendulum, J. Werner..... 404,937
Clock and coupling for barrels, casks, etc., combined, C. C. Linindoll..... 404,918
Cock, gauge, J. P. Strebig..... 405,129
Coin-actuated receptacle, E. C. Jones..... 305,215
Coffee mill, L. Drude..... 405,019
Coffin fastener, S. A. Scofield..... 404,872
Collar stuffing machine, C. Ewing..... 405,023
Condensing apparatus, C. C. Worthington..... 405,142
Conductor, underground, G. E. Tailleux..... 404,877
Cooker, steam, Schroyer & Penn..... 404,871
Cooking utensil, N. H. Ferguson..... 405,087
Coop, hen, E. Butterick..... 405,008
Corset, L. J. James..... 405,037
Corset, A. D. Nason..... 405,113
Cotton carrier, R. T. Smith..... 404,991
Coupling. See Car coupling. Thill coupling.
Cultivator, M. V. De Witt..... 405,204
Cultivator, G. Moore..... 404,922
Cultivator and cotton chopper, combined, A. H. Johnson..... 405,165
Cultivator, hand, H. C. Tubbs..... 404,985
Cupola or blast furnace, Hathaway & Stocking..... 404,908
Curtain pole, F. G. Johnson..... 404,811
Cutter. See Band cutter. Milling cutter.
Dental plugger, A. J. Sawyer..... 405,123
Derrick, L. S. Deming..... 405,082
Digger. See Potato digger.
Domino, C. M. Hyatt..... 405,164
Door, screen and storm, Weisendanger & Ulrich..... 404,999
Doors, roller for sliding, N. Clark..... 405,202
Draught equalizer, L. C. Harris..... 405,161
Draught spring, E. L. Hilderbrand et al..... 405,162
Drawer guide, D. W. Kendall..... 405,068
Dredging machine, H. S. Brown..... 404,891
Drier. See Grain drier.
Drill. See Grain drill. Rock drill.
Drill bit, J. Eagen..... 404,829
Drilling machine, electric, E. A. Sperry..... 405,187
Dyeing apparatus, E. Wood..... 405,141
Dynamos, brush holder for, W. S. Bishop..... 405,002
Earrings, mounting for, V. Gentner, Jr..... 405,157
Earthenware, C. C. Gilman..... 405,028
Electric circuit, apparatus for indicating the strength of the current in an, G. Pfannkuche..... 404,860
Electric circuit, indicating the strength of the current in an, G. Pfannkuche..... 404,861
Electric current generators, regulation of alternating, G. Pfannkuche..... 404,859
Electric machine, dynamo, O. P. Loomis..... 405,218
Electric motor, starting and stopping device, F. A. Perret..... 405,223
Electrical current generators, regulation of alternating, G. Pfannkuche..... 405,174
Electrical distribution system, T. A. Edison..... 404,902
Electrical machines, discharge device for, A. Schmid..... 405,124
Electrically controlled engine, J. E. Byrne..... 405,010
Electricity by secondary batteries, distributing, W. W. Griscom..... 404,968
Electro-magnetic transmitter, J. T. Williams..... 405,194
Electrode for electro-therapeutic body wear, H. P. Pratt..... 405,176
Elevating machine, J. E. Byrne..... 404,893
Elevating machine, electric, J. E. Byrne..... 404,895
Elevator. See Water elevator.
Embridering and edging machine, E. & R. Cornely..... 405,116
Embroidering machine, E. & R. Cornely..... 405,147
Engine. See Air engine. Electrically controlled engine. Low pressure engine. Rotary engine. Steam engine.
Engine shafts, electric indicator for, J. C. Ricketson..... 404,867
Engine shafts, electric signal for, J. C. Ricketson..... 404,866
Engines, balanced piston for steam, W. J. Thomas..... 405,132
Engines, powder gas boiler for, O. & H. Schneider..... 405,229

Eraser, blackboard, W. F. Jones..... 405,096
Excavating, hydraulic, D. N. Long..... 404,862
Exercising bar, S. S. Stockburger..... 405,128
Feed water heater, C. E. Ferreira..... 405,154
Fence, J. D. Rodgers..... 405,120
Fence, barbed, Trevitt & Mouck..... 404,879
Fence machine, picket, E. Ransom..... 404,933
Fence machine, wire, E. Hutson..... 405,094
Fence panel, folding adjustable, J. J. Ogilvie..... 404,856
Fence pickets, machine for pointing, C. B. Rice..... 405,181
Fence tightener, wire, E. Warner..... 404,938
File, letter, L. A. Merk..... 404,930
Filter beds, strainer for granular, J. W. Hyatt..... 404,911
Filter, water, Davis & Riddell..... 404,962
Finger ring, L. L. Burdon..... 404,956
Fishing reel, F. Carey (r)..... 11,006
Flask. See Powder flask.
Flax, apparatus for steeping, T. L. Henly..... 405,091
Flooring, parquet or other, J. F. Ebner..... 405,021
Fluid separator, T. J. Newsome..... 405,017
Fluids, apparatus for drawing effervescing, J. H. Walton..... 405,135
Fly catcher, C. E. K. Andersson..... 404,946
Fly fan, H. S. Brewington..... 404,890
Fly fan, C. F. Wisloh..... 405,063
Fodder binder, H. E. Fairchild..... 405,237
Folding chair, Purdy & Sadgwar..... 405,117
Folding chair or settee, H. J. Harwood..... 404,836
Food compound, dessert, W. P. Clotworthy..... 405,013
Fruit box, V. Wheat..... 404,880
Fruit gatherer, C. H. Curtis..... 405,017
Furnace. See Cupola or blast furnace. Gas furnace.
Galvanic battery, J. A. Barrett..... 405,196
Gas burner, W. F. Folmer..... 404,830
Gas burner, heating, S. L. Wiegand..... 405,139
Gas furnace, E. P. Reichhelm..... 405,051
Gas generating apparatus, W. G. Bedford..... 404,886
Gas lighting and extinguishing apparatus, automatic, N. H. Shaw..... 405,126
Gate. See Car gate. Water gate.
Gate, Hyde & Dotterrer..... 404,973
Gate, H. H. Phillips..... 405,175
Gate, E. F. Shellabarger..... 404,936
Gearing, cogged, W. Courtenay..... 404,526
Gears, machine for cutting spur and worm, G. B. Grant..... 405,030
Glove package fastener, C. T. Bull..... 405,076
Gloves, boxing, D. J. O'Sullivan..... 404,929
Grain, apparatus for transferring, weighing, and deliverings bags of, W. E. Ferguson..... 405,088
Grain binder, J. S. Davis..... 405,203
Grain cleaner, B. P. Barney..... 405,070
Grain cleaning machine, J. Leaser..... 405,168
Grain drier, J. Hill..... 405,214
Grain drier, P. P. Mast..... 404,853
Grain drill hoe, M. L. Kissell..... 404,845
Grain, magnetic machine for removing mineral substances from, M. L. Mowrer..... 405,045
Grill or guard, metallic, N. Poulson..... 404,982
Grinding mill, Quenehen & Vansteenkiste..... 405,177
Grip device, intermittent, W. H. Wild..... 405,140
Guns, means for changing the center of gravity of, W. R. Miller..... 404,921
Hammer and hatchet, combined claw, G. W. Simonds..... 404,930
Hammer, steam, J. H. Blake..... 405,072
Harness, safety hook for, C. Smith..... 405,055
Harrow, disk, G. T. Booth..... 405,005
Harvester, cotton, R. H. Purnell..... 405,049
Harvester cutter bar guide, J. D. Norris..... 405,048
Harvesters, header attachment for, H. Bryan..... 404,954
Harvesters, twine attachment for, W. N. Dick..... 405,083
Hatchway, elevator, Hooper & Petersen..... 405,163
Hay rake and baling press, combined, Hooton & Wiard..... 405,034
Hay rake, horse, T. Kissner..... 404,846
Heater. See Feed water heater. Tank heater.
Hoisting apparatus for mines, S. Salmon..... 404,935
Hoisting mechanism, differential, G. F. Clemens..... 404,958
Holder. See Paper roll holder. Rule holder.
Sash holder. Tug holder.
Hoof parer and trimmer, W. Conwell..... 405,080
Hoop, wire barrel, E. C. Gordon..... 405,029
Hot air register, side wall, C. S. Hood..... 405,092
Hub band, W. L. Hawes..... 404,837
Hub, vehicle wheel, W. L. Hawes..... 404,838
Hubs, point band for vehicle, W. L. Hawes..... 404,839
Hydrocarbon burner, J. H. Bullard..... 404,955
Ice or snow plow for railway tracks, E. Leslie..... 405,039
Indicator. See Speed indicator. Valve indicator.
Windlass indicator.
Induction coil, F. H. Brown..... 404,822
Inhaler, J. Rudolff..... 404,986
Inkstand, J. J. Hoey..... 405,083
Insulated electrical wire, H. W. Johns, Jr..... 404,913
Iron. See Sad iron.
Ironing table, W. I. Carr..... 405,144
Key. See Timepiece key.
Knife. See Pocket knife.
Knitting machine, circular, Pepper & Davis..... 404,930
Lactometer, A. L. Rousse..... 404,985
Lamp, H. W. Hayden..... 405,032
Lamp, incandescent, C. A. Backstrom..... 404,816
Lamp, oil, F. J. Allison..... 405,065
Lamp wick, tube, T. Langston..... 404,848
Lamps, apparatus for the manufacture of filaments for incandescent, H. S. Maxim..... 405,239
Lamps, manufacture of filaments for electric, H. S. Maxim..... 405,170
Lantern, Matthews & Ireland..... 405,106
Last, A. K. Chase..... 405,011
Latch and lock combined, W. W. & F. P. Pursell..... 405,060
Latch case, C. M. Burgess..... 404,892
Latch, gate, M. F. Hill..... 404,971
Latch, gate, G. C. Loar..... 404,974
Letter box, W. D. Doremus..... 404,838
Ligatures, flexible receptacle for, R. W. Johnson..... 404,843
Link, self-acting unlocking, W. F. Fisher..... 404,908
Liquid transporting and measuring vessel, H. P. & S. J. Barnhart..... 404,819
Lock. See Bag lock. Registering lock.
Lock, S. C. Harlan..... 404,835
Lock, W. H. Taylor..... 405,057
Locomotive or other engine, J. Lewis..... 405,104
Loom positive shuttle motion, C. B. Rumsey..... 404,987
Loom shuttle box operating lever, J. A. Evans..... 405,022
Loom shuttle checking and relieving mechanism, E. M. Ball..... 405,069
Looms, pile cutting apparatus for double pile fabric, J. Oswald..... 405,114
Low pressure engine, H. Haab..... 404,905
Measure, liquid, D. Bothwell..... 405,075
Measuring machine, foot, E. B. 2d, & E. B. Stimpson, 1st..... 404,994
Medicine dispenser, J. Barnes..... 404,950
Mill. See Coffee mill. Grinding mill.
Miller exterminator, J. B. Woods..... 404,942
Milling cutter, A. Whitney..... 404,940
Mining machine, electric, E. A. Sperry..... 405,188
Momentum of a train, device for indicating the measure of retardation applied to arrest the, W. H. Arnold..... 404,947

Motor. See Water motor.
Mower, J. H. Jones..... 405,238
Muff, O. Cashler..... 405,097
Oil burner, hydrocarbon, F. W. Minshall..... 405,219
Opera chair, D. Schustek..... 405,230
Oven, drying, P. McArthur..... 405,220
Package head, I. J. W. Adams..... 405,000
Pad. See Back band pad. Bosom pad.
Pan. See Bed pan.
Paper bag, J. Arkell..... 405,067
Paper bag, soft tie, J. Arkell..... 405,068
Paper coating apparatus, Manahan & Gade..... 405,044
Paper machines, spray cylinder cleaner for, G. D. Crance..... 405,015
Paper roll holder, A. Q. Ross..... 405,121
Paper tubes, machine for rolling, H. O. Whitney..... 405,138
Pencil tip, S. Kraus..... 405,102
Photograph print moulder, J. W. Alderige..... 404,814
Photographs, mount for, R. H. L. Talcott..... 405,130
Pianos, repeating action for grand, A. T. Strauch..... 404,876
Pipe testing machine, M. Sexton..... 405,054
Pipes, safety cushion for water, A. Hattersley..... 404,939
Planing machine, E. F. Autenrieth..... 404,948
Planing machines, chip breaker for, J. Connell..... 405,014
Platform. See Car platform.
Plow, C. G. Buechner..... 404,823
Plow, double shovel, E. C. Burnett..... 405,007
Pocketbooks, etc., frame for, E. Oldenbusch..... 404,979
Pocket knife, J. C. F. Schenck..... 404,870
Potato digger, J. H. Finkle..... 405,155
Pottery jigger, P. Wilkes..... 404,941
Powder flask, F. J. Rabbeth..... 404,932
Power. See Water power.
Power to steam vessels, system of applying, S. H. Timmons..... 404,878
Press. See Baling press.
Printing and delivery mechanism, L. C. Crowell..... 405,016
Printing, diaphragm to be used in stencil, M. J. D. Carter..... 405,198
Printing machine, F. H. Grote..... 405,159
Printing machine, F. Kirsch..... 405,099
Printing machine sheet delivery apparatus, A. R. Bartlau..... 404,951
Printing machine sheet delivery apparatus, G. P. Fenner..... 405,153
Printing machines, stop mechanism for web, L. C. Crowell..... 404,959
Printing machinery, J. H. Buxton et al..... 405,009
Pump, E. Neff..... 405,172
Pump, steam, N. J. Pritchard..... 405,116
Pulley bushing, Clark & Keasey..... 404,824
Rack. See Wagon rack.
Railway, electric, S. H. Short..... 404,873
Railway, suspended, J. Thomson..... 405,059
Railway switch, J. A. Duggan..... 405,020
Railway switch, J. T. Richardson..... 404,864
Rake. See Hay rake.
Reaping and mowing machines, apparatus for sharpening the cutters and fingers of, R. McGregor..... 404,976
Reel. See Fishing reel.
Reflector, lamp, G. W. Pelton..... 405,173
Refrigerator, M. S. Millard..... 404,854
Register. See Cash register. Hot air register.
Registering lock, J. Loewenthal..... 405,105
Regulator. See Temperature regulator.
Ring. See Finger ring.
Rock drill, steam, A. J. Sypher..... 405,127
Roofing plate, metallic, L. L. Sagendorph..... 405,122
Rotary engine, H. Haab..... 404,834
Routing and wood working machine, H. M. Albee..... 404,945
Ruler and blotter, combined, R. Lockwood..... 405,217
Rule holder, M. Murphy..... 404,924
Sad iron, W. Bell..... 405,071
Sash fastener, L. E. Johnson..... 405,095
Sash fastener, W. Koenen..... 404,916
Sash holder, C. A. Kraft..... 405,101
Sash holder, A. W. Nelson..... 404,977
Sash holder, E. Reed..... 405,180
Sash ventilator, storm, F. Straub..... 405,189
Saw guide, A. Goulding..... 405,210
Saw guide, band, R. McChesney..... 405,110
Saw sharpening and gumming machine, J. F. Quinn..... 405,178
Scaffold, H. Ayres..... 405,195
Screens, means for cleaning shaking, H. Seck..... 405,125
Seat. See Vehicle seat.
Secondary battery, T. H. Hicks..... 405,213
Separator. See Fluid separator.
Settee ironing board, and clothes rack, combined, W. Norris..... 404,978
Sewing machine, W. F. Dial et al..... 405,205
Sewing machine, A. Faulkner..... 404,965
Sewing machine fan attachment, W. S. Elliott..... 404,964
Sewing machine for securing stay cords and thru ends, A. Shea..... 405,228
Sewing machine for finishing buttonhole pieces, J. Reece..... 404,863
Sewing machine stand, W. A. Mack..... 405,043
Shingle sawing machine, G. J. Davis..... 404,827
Show case, J. W. Blackledge..... 405,003
Signal. See Bridge signal.
Signal apparatus, municipal, J. C. Wilson..... 405,235
Signal sounding apparatus, H. E. Pfannenstiel..... 404,980
Slasher, J. Watt..... 404,939
Sled, hand, G. Lundgren..... 404,975
Slicer, vegetable, T. Arndt..... 404,883
Snow scraper, G. A. Birch..... 404,952
Sodawater apparatus, G. W. Gilbert..... 405,027
Speaking tube, J. Walter..... 405,061
Speaking tube, pipe, etc., J. H. Rush..... 404,983
Speech or other sounds, recording and reproducing articulate, G. W. Littlehales..... 404,850
Speed indicator, C. Spratt..... 404,992
Spindle driving bands, tension regulating device for, Lawson & Dear..... 404,917
Spinning machine nipper, C. D. Clark..... 404,898
Spinning spindle support, R. White..... 405,233
Spooling machine, J. W. Foster..... 404,831
Spring. See Bolster spring. Car spring. Draught spring.
Sprinkler. See Automatic sprinkler.
Stand. See Sewing machine stand.
Staple making machine, W. Halkyard..... 405,000
Staves, machine for making barrel, M. Dallas..... 405,148
Steam boiler, Clark & King..... 404,825
Steam boiler, F. A. Gardner..... 405,209
Steam engine, compound, F. A. Gardner..... 405,208
Steam engine, single-acting, F. W. Dodd..... 405,150
Steam trap, J. F. McElroy..... 404,925
Stocking supporter, J. M. Rabitte..... 404,862
Stop mechanism, L. C. Crowell..... 404,960
Stopper. See Bottle stopper.
Store service apparatus, C. A. Whipple..... 404,882
Stove attachment, gasoline, C. A. Stockstrom (r)..... 11,007
Stove, vapor, S. Daniels..... 404,961
Stove, vapor, Z. Davis..... 405,149
Strainer for kettles, etc., W. F. Kendrick..... 405,216
Stretch bar, E. Schmidt..... 404,988
Stubble shaver, J. Mallon..... 405,169
Supporter. See Stocking supporter.
Surveyor's target, S. C. Thompson..... 405,058
Switch. See Railway switch.

Switch boards, testing apparatus for, W. E. McKivitt..... 405,221
Syringe, O. Kloppe..... 405,100
Table. See Ironing table.
Tank heater, H. Reynolds..... 405,052
Telegraphy, quadruplex, C. D. Haskins..... 405,211
Temperature regulator, electric, L. F. Easton..... 405,151
Thermometer, clinical, Hunstock & Chavez..... 405,036
Thill coupling, B. Fahrney..... 405,086
Thill coupling, C. C. Munroe..... 405,108
Thill coupling, D. Murray..... 405,109
Thimble, C. Horner..... 404,910
Thrashing machines, adjustable sieve attachment for, W. K. Dodd..... 405,018
Tile machine, W. D. Sherman..... 405,183
Timepiece key, M. Bock..... 405,004
Tongs, E. F. Barton..... 405,001
Tool, combination, A. Fromming..... 405,156
Tooth crown, artificial, C. H. Land..... 405,167
Toy parachute, W. J. Kuntzsch..... 404,847
Toy racket, G. D. Corey..... 404,899
Track laying machine, F. F. Voigt..... 404,996
Trap. See Animal trap. Steam trap.
Tub. See Wash tub.
Tube. See Boiler tube. Lamp wick tube. Speaking tube.
Tubes, apparatus for making seamless, I. G. Platt..... 405,115
Tug holder for vehicles, A. B. Webster..... 415,136
Typewriting machine, A. Grundy..... 404,883
Typewriting machine, J. G. Parkinson..... 405,222
Valve, W. A. Babcock..... 404,885
Valve, air, G. M. Davis..... 404,963
Valve, anti-freezing tank, W. H. Barrett..... 404,820
Valve for gas meters, slide, J. Hearne..... 404,970
Valve gear, F. A. Gardner..... 405,207
Valve indicator, D. Kennedy..... 404,844
Vehicle running gear, F. A. Goffray..... 405,158
Vehicle seat, shifting, F. Rightmyer..... 405,224
Velocipede, W. Goulden..... 404,882
Ventilator. See Sash ventilator.
Vessels, apparatus for coupling, G. A. Steinbach..... 404,933
Veterinary syringe, J. W. Whitelock..... 405,137
Wagon brake, L. Wetherbee..... 405,062
Wagon, dumping, L. Busse..... 404,957
Wagon rack, hay, E. J. Tracy..... 405,190
Wash boiler, A. F. Tarr..... 405,056
Wash tub, A. G. Robinson..... 404,984
Washer coils, making leather, G. H. Avery..... 404,949
Watchmaker's tool, A. F. Thompson..... 404,937
Water closets, etc., floor flange for, B. C. Smith..... 404,874
Water elevator, Lathrop & Heard..... 404,849
Water gate, C. J. Cheney..... 405,079
Water heating apparatus, J. Knoche..... 404,915
Water motor, turbine, P. T. Sanford..... 404,863
Water power, means for obtaining, D. N. Long..... 404,851
Water wheel, J. T. Rohm..... 405,053
Weaner, calf, W. H. Predmore..... 404,931
Well sinking apparatus, T. G. Chapman..... 405,139
Wheel. See Water wheel.
Wheel, G. W. Howell..... 405,093
Wheelbarrow, F. H. Harris..... 404,907
Whip socket and rein holder, combined, A. Thompson..... 405,133
Wick raising shaft, W. H. Clemes..... 405,078
Winding yarn or thread on cards, spindle for, J. J. Clark..... 405,077
Windlass, J. Knoche..... 404,914
Windlass indicator, ship's, D. H. Rivers..... 404,983
Window cap, H. Symonds..... 405,232
Wire cables for suspension bridges, device for twisting, E. E. Runyon..... 404,934
Zinc vapors and collecting the metallic zinc therefrom, apparatus for condensing, E. Walsh, Jr..... 405,134

DESIGNS.

Ceiling, metallic, L. L. Sagendorph..... 19,155
Decorative fabric, C. H. Koster..... 19,152
Gem setting, J. W. Lawson..... 19,153
Grate, portable fireplace, E. L. Caley..... 19,147
Grate, portable fireplace, Caley & Read..... 19,148
Shirt bosom, V. H. Rothschild..... 19,154
Stove lid lifters, etc., handle for, W. W. Sly..... 19,156
Terret, harness, E. L. Howe..... 19,151
Wall pocket, M. Benas..... 19,146

TRADE MARKS.

Beef, compressed cooked, Armour Packing Co..... 16,704
Boots, shoes, gaiters, and slippers, Acme Staple and Machine Company..... 16,703
Canned fruits, vegetables, and shell fish, Piper Packing Co..... 16,716
Cotton linings, silesias, satens, cambrics, and twills, F. L. St. John..... 16,721
Dress shields, A. Hutchinson & Co..... 16,709
Food, infants' prepared, W. C. Wagner..... 16,723
Grafting compounds and preparations for destroying insects, Ongerth Grafting Compound Company..... 16,715
Guano, R. A. Wooldridge & Co..... 16,727
Hams, sugar cured, M. Walton, Jr..... 16,725
Hose, hydraulic, New Jersey Car Spring and Rubber Company..... 16,714
Iron and steel and manufactures of iron and steel, Sandvikens Jernverks Aktie Bolag..... 16,719
Iron and steel, articles of, Sandvikens Jernverks Aktie Bolag..... 16,720
Knitted goods, waists made from, J. McCreery & Co..... 16,712
Liniments and blood purifiers, P. F. Perrin..... 16,718
Medical compounds for external application, E. D. Kelly..... 16,707
Metals and manufactures therefrom, Low Moor Company..... 16,711
Naphthalene, pure white ball solid, H. M. Black..... 16,705
Newspaper, C. M. Palmer..... 16,717
Paints, mixed, Wadsworth Paint and Oil Manufacturing Company..... 16,724
Revolvers, shotguns, and rifles, H. Boker & Co..... 16,706
Stoves, heaters, ranges, and furnaces, portable, S. A. Suydam..... 16,722
Soap, sachet powder, and the like, perfumed, Ladd & Coffin..... 16,710
Suits, ladies' and children's, J. McCreery & Co..... 16,713
Trimmings for dresses and cloaks, S. Weil..... 16,726
Veterinary medicines or specifics, Humphreys' Homeopathic Medicine Company..... 16,708

A Printed copy of the specification and drawing of any patent in the foregoing list will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York.

Canadian Patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of \$40 each. If complicated, the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - \$1.00 a line.

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

USE ADAMANT WALL PLASTER

It is Hard, Dense, and Adhesive. Does not crack or crack. It is impervious to wind, water, and disease germs. It dries in a few hours. It can be applied in any kind of weather. It is in general use. Licenses granted for the mixing, using, and selling. Address ADAMANT MFG. CO. 71 E. Genesee Street, Syracuse, N. Y.

ADVICE TO YOUNG MECHANICAL ENGINEERS.—Address by Prof. Perry, to his students at the Finsbury Technical College. A paper of great value and interest to all working engineers. With one engraving. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 561. Price 10 cents. To be had at this office and from all newsdealers.

Seneca Falls Mfg. Co., 695 Water St., Seneca Falls, N. Y.

ICE-HOUSE AND REFRIGERATOR. Directions and Dimensions for construction, with one illustration of a cold house for preserving fruit from season to season. The air is kept dry and pure throughout the year at a temperature of from 34° to 38°. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. 116. Price 10 cents. To be had at this office and of all newsdealers.

SEBASTIAN, MAY & CO'S Improved Screw Cutting Foot & Power LATHES \$60 Drill Presses, Chucks, Drills, Dogs, and machinists' and amateurs' outfits. Lathes on trial. Catalogues mailed on application. 165 W. 2d St., Cincinnati, O.

INGERSOLL-SERGEANT ROCK DRILL CO. 10 Park Place, N. Y. Rock Drills, Air Compressors, Stone Channelling Machines, Coal Cutters, Diamond Core Drills, Boilers, Hoists, Electric Blasting Batteries, Fuse, Wire, etc. Complete Plants of Mining, Tunneling, and Quarrying Machinery.

PNEUMATIC DYNAMITE TORPEDO Gun. An exhaustive account of this new weapon and of the experiments made with it; along with a description and illustration of a proposed dynamite cruiser, with 6 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 593. Price 10 cents. To be had at this office and from all newsdealers.

ROCK DRILLS AIR COMPRESSORS & GENERAL MACHINERY FOR MINING TUNNELING. QUARRY & RAILROAD WORK RAND DRILL CO 23 PARK PLACE NEW YORK

JUST OUT! ALUMINUM-STEEL HACK SAW. Frame and 1 doz. blades, \$2; Blades per doz., 8-inch, \$1, by mail upon receipt of price. Hard but not brittle. CRESCENT MFG. CO., CLEVELAND, O. New catalogue of Engineers' Specialties.

ASBESTOS MINERS & MANUFACTURERS. The ASBESTOS PACKING CO 159 CONGRESS ST BOSTON

PHOTOGRAPHS. The photographing of Machinery, Bridges, Factories, and Iron Work of all descriptions. Write for samples. GEO. F. HALL & SON, 157 Fulton Street, New York.

CATALOGUES FREE TO ANY ADDRESS TOOLS OF ALL KINDS GOODNOW & NIGHTMAN BOSTON

\$3 PRINTING PRESS For cards, labels, etc. Circular press, \$3. Stoves for small newspapers, \$44. Rotary jobber, 9x13, \$100. Do all your own printing and advertising. Full printed rules for type-setting, etc. Send 2 stamps for catalogue of presses, type, cards, etc., to factory. KELSEY & CO., Meriden, Conn.

Stored Energy ACCUMULATORS for Electric Lighting and Street Car Propulsion. ELECTRICAL ACCUMULATOR COMPANY No. 44 Broadway, New York City.

Edco System. Complete Electric Light and Power Plants. Street Cars equipped for Electric Propulsion. The oldest and most experienced Electric Motor Co. in the world. THE ELECTRO DYNAMIC COMPANY, No. 224 Carter St., Philadelphia, Pa.

© 1889 SCIENTIFIC AMERICAN, INC.

Davis's Bricks, Tiles, and Terra-Cotta

JUST READY.

A NEW EDITION.

A Practical Treatise on the Manufacture of Bricks, Tiles, Terra-Cotta, etc.; including Hand-Made, Dry Clay, Tempered Clay, Soft Mud, and Stiff Clay Bricks, also Front, Hand Pressed, Steam Pressed, Re-Pressed, Ornamentally Shaped and Enamelled Bricks, Drain Tiles, Straight and Curved Sewer and Water Pipes, Fire Clays, Fire Bricks, Glass Tiles, Terra-Cotta, Roofing Tiles, Flooring Tiles, Art Tiles, Mosaic Tiles, and Imitation of Intarsia or Inlaid Surfaces, comprising every important product of Clay employed in Architecture, Engineering, the Blast Furnace, for Retorts, etc., with a History and the Actual Processes in Handling, Disintegrating, Tempering and Moulding the Clay into the shape, Drying Naturally and Artificially, Setting, Burning with Coal, Natural Gas and Crude Oil Fuels, Enamelling in Polychrome Colors, Composition and Application of Glazes, etc., including Full Detailed Descriptions of the Most Modern Machines, Tools, Kilns, and Kiln Roofs used. By Charles Thomas Davis. Second Edition. Thoroughly Revised. Illustrated by 271 engravings, 501 pages. 8vo.

Price \$5.00, by mail, free of postage to any address in the world.

CONTENTS.—CHAPTER I. The History of Bricks. II. General Remarks concerning Bricks, their Size, Strength, and other qualities. Ornamental Bricks, Architectural Terra-Cotta, Blue Bricks, Salt-petre Exudations upon Brick Work. III. Enamelling, Glazing, and Ornamenting Bricks and Tiles, Earthenware, etc. IV. Selecting Clays for Various Kinds of Bricks—The Different Varieties of Clay—The Characteristics, Qualities, and Localities—How to Color Bricks Red—Kaolin—Terra-Cotta Clays—Fire Clays—Exploring, Digging, and Marketing Fire Clays—Washing Clay. V. Moulding and Burning a Kiln of Hand-Made Bricks. VI. Manufacture of Dry Clay Bricks. VII. The Manufacture of Tempered Clay Bricks, including a description of the most modern Machinery Employed. VIII. Kilns. IX. The Manufacture of Pressed and Ornamental Bricks. X. The Manufacture of Fire Bricks. XI. The Manufacture of Drain Tiles. XII. The Manufacture of Sewer Pipes. XIII. The Manufacture of Roofing Tiles. XIV. The Manufacture of Architectural Terra-Cotta. XV. Ornamental Tiles, etc. Index.

A circular of 6 pages quarto, giving the full Table of Contents of this important Book, with specimens of the illustrations, will be sent free of postage to anyone in any part of the world who will furnish his address.

HENRY CAREY BAIRD & CO.,
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS
810 Walnut St., Philadelphia, Pa., U. S. A.

ARCHITECTURAL BOOKS.

Useful, Beautiful, and Cheap.

To any person about to erect a dwelling house or stable, either in the country or city, or any builder wishing to examine the latest and best plans for a church, school house, club house, or any other public building of high or low cost, should procure a complete set of the ARCHITECTS' AND BUILDERS' EDITION OF THE SCIENTIFIC AMERICAN.

The information these volumes contain renders the work almost indispensable to the architect and builder, and to persons about to build for themselves they will find the work suggestive and most useful. They contain colored plates of the elevation, plan, and detail drawings of almost every class of building, with specification and approximate cost.

Four bound volumes are now ready and may be obtained, by mail, direct from the publishers or from any newsdealer. Price, \$2.00 a volume. Stitched in paper covers. Subscription price, per annum, \$2.50. Address and remit to

MUNN & CO., Publishers,
361 Broadway, New York.

COMPLETE STEAM PUMP
ONLY SEVEN DOLLARS

DEMAND THIS PUMP
OF YOUR DEALER. OR WRITE
TO US FOR PRICES.

VAN DUZEN'S PATENT
VAN DUZEN & TIFT.
SOLE MAKERS
CINCINNATI, O.

ICE-HOUSE AND COLD ROOM.—BY R. G. Hatfield. With directions for construction. Four engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, 59. 1-price 10 cents. To be had at this office and of all newsdealers.

WATER MOTORS.

The most efficient and economical means of obtaining from one-eighth to fifteen horse power and upward. A motor which does the greatest amount of work with the use of the smallest stream of water, specially adapted for running cheaply and efficiently. Printing Presses, Elevators, Church Organs, Coffee Mills, Sewing Machines, Lathes, Dental Contrivances, and in fact, any piece of Mechanism.

Binghamton Hydraulic Power Co., 152 State Street, Binghamton, N. Y.

SEAMLESS TUBES.—DESCRIPTION of the various processes of manufacture; with 44 figures illustrative of the apparatus used. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. 638. Price 10 cents. To be had at this office and from all newsdealers.

A NEW CATALOGUE
OF
A VALUABLE PAPERS

Contained in SCIENTIFIC AMERICAN SUPPLEMENT, sent free of charge to any address.

MUNN & CO., 361 Broadway, New York.

PERFECT NEWSPAPER FILE

The Koch Patent File, for preserving newspapers, Magazines, and pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can be supplied for the low price of \$1.50 by mail, or \$1.25 at the office of this paper. Heavy board sides; inscription "SCIENTIFIC AMERICAN" in gilt. Necessary for every one who wishes to preserve the paper. Address

MUNN & CO., Publishers SCIENTIFIC AMERICAN.

DEAFNESS and Noises in HEAD

Entirely Cured by
Peck's Pat. Improved
Tubular Ear Cushions. Whispers heard distinctly. Unseen, comfortable, self-adjusting. Successful when all remedies fail. Sold only by
F. H. CROX, 553 Broadway, cor. 14th St., N. Y. Write or call for illustrated book of proofs FREE.

CUTLER DESK. BEST IN THE WORLD.

DEEP KEEL AND CENTER BOARD
Yachts.—A paper by Mr. B. Martell, chief surveyor of Lloyd's Register of British and foreign shipping, discussing the comparative merits of those two forms of craft for racing purposes. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 662. Price 10 cents. To be had at this office and from all newsdealers.

CONTRACTORS
WE MAKE THE LARGEST LINE OF
ROAD GRADERS, SCRAPERS, PLOWS, ETC.
FOR CONSTRUCTION
IN THE WORLD

NEW ERA
Railroad Builder,
Wagon Road Grader,
Wagon Loader, and
Ditching Machine.
It will place in an embankment 1000 cubic yards of earth in 10 hours at a cost of 1 1/2 to 2 1/2 cts. per yd.

WELL TOOLS
WE MANUFACTURE THE LARGEST LINE OF WELLBORING TOOLS IN THE WORLD

CARPENTER ST., CARROLL AVE.—CHICAGO, ILL. U.S.A.

Lightning Well-Sinking Machinery.
Makers of Hydraulic, Jetting, Revolving, Artesian, Mining, Diamond Tools, Wells and Prospecting Engines, Boilers, Wind Mills, Pumps, etc. SOLD ON TRIAL. AN ENCYCLOPEDIA OF 1,000 Engravings, Earth Stratification, Determination of Minerals, and Quality of Water. Gives Light, finds Gold. Mailed for 25 cts. Gas Book 25 cts. The American Well Work, AURORA, ILL.

OIL WELL SUPPLY CO. Ltd.
91 & 92 WATER STREET,
Pittsburgh, Pa.,
Manufacturers of everything needed for
ARTESIAN WELLS
for either Gas, Oil, Water, or Mineral
Pests, Boilers, Engines, Pipe,
Cordage, Drilling Tools, etc.
Illustrated catalogue, price
lists and discount sheets
on request.

ARTESIAN
Wells, Oil and Gas Wells, drilled by contract to any depth, from 50 to 800 feet. We also manufacture and furnish everything required to drill and complete same. Portable Horse Power and Mounted Steam Drilling Machines for 100 to 600 ft. Send 6 cents for illustrated catalogue. Pierce Artesian and Oil Well Supply Co., 80 Beaver Street, New York.

PULLEYS, HANGERS, FRICTION CLUTCHES. 44 Park Place, N. Y.

ICE and REFRIGERATING MACHINES

The Pictet Artificial Ice Company (Limited), Room 6, Coal & Iron Exchange, New York.

USEFUL BOOKS.

Manufacturers, Agriculturists, Chemists, Engineers, Mechanics, Builders, men of leisure, and professional men, of all classes, need good books in the line of their respective callings. Our post office department permits the transmission of books through the mails at very small cost. A comprehensive catalogue of useful books by different authors, on more than fifty different subjects, has recently been published for free circulation at the office of this paper. Subjects classified with names of author. Persons desiring a copy, have only to ask for it, and it will be mailed to them. Address,

MUNN & CO., 361 Broadway, New York.

Clark's Noiseless Rubber Truck Wheels
Save floors. Anti-Friction Casters. Rubber Furniture Casters, etc. Catalogue free.
Geo. P. Clark, Box L, Windsor Locks, Ct.

2nd MACHINERY
N. Y. Mach'y Depot, Bridge Store 16, Frankfort St., N. Y.

ASBESTOS Fire Felt Coverings, Packings, Sheathings, &c.
The CHALMERS-SPENCE CO., Mfrs.
419-425 8th Street, East River, N. Y.

TIMBER AND SOME OF ITS DISEASES
—An elaborate and very valuable series of papers showing the various causes of the decay of timber and how in many cases it can be prevented. Illustrated with 39 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 637, 638, 640, 643, 644, 648, 656, 661, 664, 665. Price 10 cents each, or \$1 for the entire series. To be had at this office and from all newsdealers.

SAVE MONEY. Before you buy
BICYCLE or GUN
Send to A. W. GUMP & CO., Dayton, Ohio, for prices. Over 400 shop-worn and 2d-hand bicycles. Repairing and Nickeling. Bicycles, Guns and Type-Writers taken in trade.

MACHINERY.
BARREL
E. & R. HOLMES,
BUFFALO, N. Y.

ALUMINUM. INFLUENCE OF UPON
Cast Iron.—A paper by W. J. Keep, C.E., giving the results of a series of carefully conducted tests to settle the question as to whether aluminum which has been added to iron remains therein after it has been cast. With 7 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 662. Price 10 cents. To be had at this office and from all newsdealers.

AGENTS \$75 per month, and expenses
paid any active man or woman to sell our goods by sample and live at home. Salary paid promptly and expenses in advance. Full particulars and sample case FREE. We mean just what we say. Address **Standard Silverware Co., Boston, Mass.**

STEAM REGULATING SPECIALTIES

Made by us are guaranteed and used by all the car heating companies, railroads, etc.

MASON REGULATOR CO., Boston, Mass.

2 to 40 H. P.

THE MOTOR of 19th Century.
The Best on manufactured gas and the only one that makes its own gas, can be used Any Place, to do Any Work, and by Any One.

For circulars, etc., address
Charter Gas Engine Co.
P. O. Box 148, Sterling, Ill.
Branch House, 152 Lake St., Chicago.
New York Agency,
W. J. Dougherty, 470 Canal Street.

The Paris Exposition--Illustrated.

The SCIENTIFIC AMERICAN SUPPLEMENT will for some months to come contain illustrations of the buildings and the most interesting objects to be seen at the great French Exposition opened at Paris a few days ago. The illustrations which will embellish the SCIENTIFIC AMERICAN SUPPLEMENT will add an interesting and useful feature to the publication, and subscribers to the regular edition of the SCIENTIFIC AMERICAN, who are not patrons of the SCIENTIFIC AMERICAN SUPPLEMENT, are advised to have their name enrolled on the SUPPLEMENT subscription list at once, so as to secure all the illustrated exposition numbers for preservation. Price, \$5 a year, \$2.50 for six months. News agents everywhere receive subscriptions, or remit to the publishers,

MUNN & CO., 361 Broadway, New York.

Barnes' Foot-Power Machinery
Complete outfits for Actual Workshop Business. A customer says: "Considering its capacity and the accuracy of your No. 4 Lathe, I can see how it can be produced at such low cost. The velocipede foot-power is simply elegant. I can turn steadily for a whole day, and at night feel as little tired as if I had been walking around." Descriptive Price List Free.

W. F. & JOHN BARNES CO.,
199 RUBY ST., ROCKFORD, ILL.

LIME KILN that saves 36 per cent. over any patent kiln known. Guaranteed to burn No. 1 lime with coal, wood, or oil. Rights for sale.

C. D. PAGE, Patentee, Rochester, N. Y.

Moss Engraving Co. 535 PEARLY NEW YORK
cor Elm St

OUR SPECIALTY: FINE ILLUSTRATED CATALOGUES
BY OUR NEW LOSS-TIME PROCESS.
Send Green Stamp for Moss Engraving Specimens.

THE GREAT TELESCOPES OF THE
World.—A paper by Prof. John K. Roes, giving a popular account of all the great telescopes, their powers and limitations and method of construction. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 635. Price 10 cents. To be had at this office and from all newsdealers.

PULLEYS, HANGERS, FRICTION CLUTCHES. 44 Park Place, N. Y.

ICE and REFRIGERATING MACHINES

The Pictet Artificial Ice Company (Limited), Room 6, Coal & Iron Exchange, New York.

ON VARIABLE LOAD. INTERNAL
Friction, and Engine Speed and Work.—By Dr. R. H. Thurston. The result of recent experiments to determine the character of the internal friction of engines without condensers, and the method of its variation, with the variation of the usual conditions of operation. With 11 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 669 and 670. Price 10 cents each. To be had at this office and from all newsdealers.

EVERY USER OF MACHINERY
SHOULD LEARN
How to Use Loose Pulleys.
Useful information on this subject is given in our "Catalogue No. 55," sent free to any address.

VAN DUZEN & TIFT, Cincinnati, O.

PULLEYS. Cheapest, Lightest, and Best. Made by Hardwood Split P. Co., Menasha, Wis.

FAMILY ICE MACHINE Ice in few minutes. Price, \$10 to \$185.
Circular. L. Dermigny, 126 West 25th Street, New York.

CHEMISTRY OF SUBSTANCES
taking part in Putrefaction and Antiseptics.—Three lectures by John M. Thomson, F.R.S.E., describing some of the more important properties of such substances as take part in putrefaction and antiseptics, with the general bearings of some of the changes that lead to their production. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 635, 636, and 637. Price 10 cents each. To be had at this office and from all newsdealers.

MINERAL WOOL
PROOFING, and DEAFENING.
Pamphlet and Sample Free.
Western Mineral Wool Co.,
Cleveland, Ohio.

THE PENNA. DIAMOND DRILL & MFG. CO.
BIRDSBORO, PA., Builders of High Class Steam Engines, Diamond Drilling and General Machinery. Flour Mill Rolls Ground and Grooved.

TO BUSINESS MEN.

The value of the SCIENTIFIC AMERICAN as an advertising medium cannot be overestimated. Its circulation is many times greater than that of any similar journal published. It goes into all the States and Territories, and is read in all the principal libraries and reading rooms of the world. A business man wants something more than to see his advertisement in a printed newspaper. He wants circulation. This he has when he advertises in the SCIENTIFIC AMERICAN. And do not let the advertising agent influence you to substitute some other paper for the SCIENTIFIC AMERICAN, when selecting a list of publications in which you decide it is for your interest to advertise. This is frequently done, for the reason that the agent gets a larger commission from the papers having a small circulation than is allowed on the SCIENTIFIC AMERICAN.

For rates see top of first column of this page, or address

MUNN & CO., Publishers.
361 Broadway, New York.

PENSIONS \$50,000,000 for Soldiers, Sailors, their widows or parents. PENSIONS INCREASED. Discharges procured. \$250 No pension, NO FEE. Latest law, pamphlet free! PATRICK O'FARRELL, Att'y, Washington, D. C.

Proposals for Registered Package Envelopes of Improved Design.—POST OFFICE DEPARTMENT, Washington, D. C., June 4, 1889.—In order to find, if possible, a better and more secure means of enclosure for registered letters, sealed proposals are invited from inventors and others, and will be received at this Department until 12 M. of Tuesday, the 2d day of July, 1889, to furnish registered package envelopes of any improved design or device that bidders may desire to submit, said envelopes to be furnished in such quantities as may be called for by the Postmaster General during the fiscal year ending June 30, 1890; also to convey to the Government the ownership or right of use in such improved device or design of registered package envelope as may be found acceptable for the purpose. Blank forms of proposal, with specifications giving full information, will be furnished on application to the Third Assistant Postmaster General, Washington, D. C.

JOHN WANAMAKER, Postmaster General.

Proposals for Dredging in Penobscot River, Maine, between Bucksport and Winterport. UNITED STATES ENGINEER OFFICE, Portland, Maine, June 4, 1889.—Sealed proposals in triplicate for Dredging in Penobscot River, Maine, between Bucksport and Winterport, will be received at this office, No. 537 Congress Street, until 3 P. M. of Tuesday, July 2, 1889, and then opened. Attention is invited to Acts of Congress approved February 26, 1885, and February 23, 1887, Vol. 2, page 332, and Vol. 24, page 414. Statutes at Large. All necessary information furnished by J. A. R. SMITH, Lieut.-Col. Corps of Engineers, U. S. Army.

To Vessel Owners.—ENGINEER OFFICE, U. S. ARMY, Newport, R. I., June 13, 1889. Vessels equipped for handling stone will soon be required for the Government work at the Harbor of Refuge at Block Island, R. I. Owners or parties interested who desire to charter such vessels to the United States, or to freight stone by the ton, are invited to communicate with this office.

W. R. LIVERMORE, Major of Engineers.

Sealed Bids will be received until July 1, 1889, for putting in Water Works in Wilmington, Ohio. Address ED. HUGHES, Corporation Clerk.

FOREIGN PATENTS

THEIR COST REDUCED.

The expenses attending the procuring of patents in most foreign countries having been considerably reduced the obstacle of cost is no longer in the way of a large proportion of our inventors patenting their inventions abroad.

CANADA.—The cost of a patent in Canada is even less than the cost of a United States patent, and the former includes the Provinces of Ontario, Quebec, New Brunswick, Nova Scotia, British Columbia, and Manitoba.

The number of our patentees who avail themselves of the cheap and easy method now offered for obtaining patents in Canada is very large, and is steadily increasing.

ENGLAND.—The new English law, which went into force on Jan. 1st, 1885, enables parties to secure patents in Great Britain on very moderate terms. A British patent includes England, Scotland, Wales, Ireland and the Channel Islands. Great Britain is the acknowledged financial and commercial center of the world, and her goods are sent to every quarter of the globe. A good invention is likely to realize as much for the patentee in England as his United States patent produces for him at home, and the small cost now renders it possible for almost every patentee in this country to secure a patent in Great Britain, where his rights are as well protected as in the United States.

OTHER COUNTRIES.—Patents are also obtained on very reasonable terms in France, Belgium, Germany, Austria, Russia, Italy, Spain (the latter includes Cuba and all the other Spanish Colonies), Brazil, British India, Australia, and the other British Colonies.

An experience of FORTY years has enabled the publishers of THE SCIENTIFIC AMERICAN to establish competent and trustworthy agencies in all the principal foreign countries, and it has always been their aim to have the business of the clients promptly and properly done and their interests faithfully guarded.

A pamphlet containing a synopsis of the patent laws of all countries, including the cost for each, and other information useful to persons contemplating the procuring of patents abroad, may be had on application to this office.

MUNN & CO., Editors and Proprietors of THE SCIENTIFIC AMERICAN, cordially invite all persons desiring any information relative to patents, or the registry of trade-marks, in this country or abroad, to call at their offices, 361 Broadway. Examination of inventions, consultation, and advice free. Inquiries by mail promptly answered.

Address, **MUNN & CO.,**
Publishers and Patent Solicitors,
361 Broadway, New York.

BRANCH OFFICES: No. 622 and 624 F Street, Pacific Building, near 7th Street, Washington, D. C.

WANTED.—Machinery to build. Specialties in CAST IRON to manufacture. Fine solid CASTINGS for Dies, Moulds, Dynamos, Motors, etc. MANUFACTURER, P. O. Box 886, New Haven, Conn.

FOR SALE. The Davis Siding-Gage Patents, 1 W. M. HAYHURST, Investments and Loans, 923 17th Street, Denver, Colorado.

FOR SALE.—Whole or half interest in a Foundry and Machine Shop, with reliable water power. Doing a good business. Address **FOUNDRY, P. O. Box 773, New York.**

MANUFACTURER WANTED for Patent No. 393,759, Book Carriage (wood). Illustrated in SCI. AM., April 6th, 1889. L. C. LEITH, Galveston, Texas.

The Scientific American

PUBLICATIONS FOR 1889.

The prices of the different publications in the United States, Canada, and Mexico are as follows:

RATES BY MAIL.	
The Scientific American (weekly), one year	\$3.00
The Scientific American Supplement (weekly), one year	5.00
The Scientific American, Export Edition (monthly) one year	5.00
The Scientific American, Architects and Builders Edition (monthly), one year	2.50
COMBINED RATES.	
The Scientific American and Supplement	\$7.00
The Scientific American and Architects and Builders Edition	5.00
The Scientific American, Supplement, and Architects and Builders Edition	9.00

Proportionate Rates for Six Months.

This includes postage, which we pay. Remit by postal or express money order, or draft to order of


MUNN & CO., 361 Broadway, New York.

JOHN MILLARD writes from Oshkosh, Wis., Nov. 20.—"Dyer's Beard Elastic has produced a heavy growth of hair in 4 weeks. One Plaster the growing strength of my beard known. Price 1 cent each, 6 for 5 cents." SMITH'S MFG. CO., Patine, Ill.

Advertisements.

Inside Page, each insertion --- 25 cents a line.
Back Page, each insertion --- \$1.00 a line.

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.



RIDE CYCLES!

VICTORS ARE BEST!

Bicycles, Tricycles, and Safeties.

Send for free illustrated Catalogue.

Overman Wheel Co., Makers,
BOSTON, MASS.

THE COPYING PAD.—HOW TO MAKE
and how to use, with an engraving. Practical directions how to prepare the gelatine pad, and also the aniline ink by which the copies are made; how to apply the written letter to the pad; how to take off copies of the letter. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 438. Price 10 cents. For sale at this office and by all newsdealers in all parts of the country.

THE KODAK CAMERA



Makes 100 Instantaneous Pictures by simply pressing a button. Anybody can use it who can wind a watch. No focusing. No tripod. Rapid Rectilinear Lens. Photographs moving objects. Can be used indoors.

Division of Labor—Operator can finish his own pictures, or send them to the factory to be finished.

Morocco covered Camera, in handsome sole-leather case, loaded for 100 pictures, for full description of "Kodak" see Sci. Am., Sept. 15, '88.


Price, \$25.00. Reloading, \$2.00.

The Eastman Dry Plate & Film Co.

Rochester, N. Y. 115 Oxford St., London.

Send for copy of Kodak Primer with Kodak Photograph.

JENKINS' AUTOMATIC AIR VALVE



We do away with the expansion of metal and depend on an expandable elastic plug of Jenkins Packing, made specially for the purpose, thus insuring a perfect seat.

PRICES, PER DOZEN.
Finished & Nickel Plated, \$7.50
Drip Cups for same, - - 2.00

JENKINS BROS., 71 John St., N. Y.; 105 Milk St., Boston; 21 North 5th St., Phila.; 54 Dearborn St., Chicago.

GRAPHOPHONE AND PHONOGRAPH.

—An interesting account of the Edison, Bell, and Taintor apparatus for the mechanical reproduction of speech, with detailed description of the same. With 11 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 669. Price 10 cents. To be had at this office and from all newsdealers.


QUEEN & CO. MANUFACTURERS AND IMPORTERS
924 CHESTNUT ST. PHILADELPHIA PENN.

MAGIC LANTERNS
SCIOPTICONS
STEREOPTICONS
FIRST CLASS
PROJECTING APPARATUS
FOR SCHOOLS COLLEGES
AND PUBLIC ENTERTAINMENTS

Scientific Book Catalogue

RECENTLY PUBLISHED.
Our new catalogue containing over 100 pages, including works on more than fifty different subjects. Will be mailed free to any address on application.

MUNN & CO., Publishers Scientific American,
361 Broadway, New York.



The Tuerk Water Motor.

Engineers all over the country write us that it is the only motor in use for rotary power that gives perfect satisfaction, and that with metered water no other motor sticks but the "Tuerk."

For sale only by
Tuerk Hydraulic Power Co.
12 Cortlandt St., New York.
39 Dearborn St., Chicago.

TYPEWRITERS

Send for New Illustrated Catalogue describing all Machines. Largest stock in America.
New or Second-hand Typewriters of all makes.
Machines Rented in any part of the country. Supplies in abundance. Prices the lowest.

NATIONAL TYPEWRITER EXCHANGE,
161 La Salle Street, Chicago, Ill.

TOOL AGENTS WANTED.
In every SHOP in the United States.
Send for free Catalogue. Stationery &c.—
THE FINEST OF MECHANICAL TOOLS A SPECIALTY.
C. JAMES 95 LAKE ST. CHICAGO ILL.

PATENTS.

MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had forty-two years' experience, and now have unequalled facilities for the preparation of Patent Drawings, Specifications, and the prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs. Munn & Co. also attend to the preparation of Caveats, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business entrusted to them is done with special care and promptness, on very reasonable terms.

A pamphlet sent free of charge, on application, containing full information about Patents and how to procure them; directions concerning Labels, Copyrights, Designs, Patents, Appeals, Reissues, Infringements, Assignments, Rejected Cases. Hints on the Sale of Patents, etc.

We also send, free of charge, a Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world.

MUNN & CO., Solicitors of Patents,
361 Broadway, New York.

BRANCH OFFICES.—No. 622 and 624 F Street, Pacific Building, near 7th Street, Washington, D. C.

H. W. JOHNS' Asbestos Sectional Pipe Covering



A Non-Conducting Covering for Steam and Hot Water Pipes, Boilers, etc.

READILY ATTACHED OR REMOVED BY ANY ONE.

H. W. Johns Manufacturing Company,

SOLE MANUFACTURERS OF


H. W. Johns' Asbestos Roofing, Building Felts, Fire-Proof Paints, Liquid Paints, etc.

87 Maiden Lane, New York.

CHICAGO. PHILADELPHIA. LONDON.



JAMES B. EADS.—AN ACCOUNT OF the life and labors of this eminent engineer. With a portrait. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 592. Price 10 cents. To be had at this office and from all newsdealers.



STEAM ENGINES

Upright and Horizontal, Stationary, Portable and Semi-Portable.

5 to 16 Horse Power.

Illustrated Pamphlet Free. Address

JAMES LEFFEL & CO.

SPRINGFIELD, OHIO,

or 110 Liberty St., New York.

SAWS Wanted 50,000 Sawyers and Lumbermen to send us their full address for a copy of Emerson's Book of SAWS. We are first to introduce NATURAL GAS for heating and tempering SAWS with wonderful effect upon improving their quality and toughness, enabling us to reduce prices. Address EMERSON, SMITH & CO. (Ltd.), Beaver Falls, Pa.

INVENTORS and others desiring new articles manufactured and introduced, address P. O. Box 86, Cleveland, O.


HARRISON CONVEYOR!
For Handling Grain, Coal, Sand, Clay, Tan Bark, Cinders, Ores, Seeds, &c.
Sole Manufacturers, BORDEN, SELLECK & CO., Chicago, Ill.

THE BOOKWALTER STEEL AND IRON CO.

Is now prepared to grant licenses under the Bookwalter, Robert, and other patents owned by it. Parties desiring licenses to operate under these patents will please state in their application, for what purpose they design using the process, whether for steel castings, for ingots of dead soft steel, for tool steel, or for ordnance purposes.

No. 18 Cortlandt Street, New York.

CONCRETE.—BY JOHN LANDIS.
Practical notes on the mixing and manipulation of cements. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 643. Price 10 cents. To be had at this office and from all newsdealers.



OIL ENGINES.

For Printers, Steam Yachts, pumping water, sawing wood, making ice-cream, Carpenters, Mechanics. 1 to 8 H. P. Fuel, Kerosene. No dust. Automatic in fuel and water supply. Illustrated Catalogue free. See illustrated notice in Sci. Am. Aug. 4, 1888.

SHIPMAN ENGINE CO.

32 Pearl St., Boston, Mass.

THE AMERICAN BELL TELEPHONE CO.

95 MILK ST., BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use, and all the consequences thereof, and liable to suit therefor.

DYNAMITE PULVERIZER.

Dry Pulverizing. Impalpable Dust.


Saw Dust, Barks, and all Hard and Soft materials equally well Pulverized. Light running. Wearing parts cheaply replaced. Product, two hundred lbs. to 15 tons, according to size and power.

Try us. Write for prices.

F. P. Rosback, 'Agt., 342 Dearborn St., Chicago.

MANGANESE STEEL AND ITS PROPERTIES.

—Abstract of two papers on this subject by Mr. Robert A. Hadfield, Assoc. M. Inst. C.E. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 640. Price 10 cents. To be had at this office and from all newsdealers.



WEITMYER PATENT FURNACE.

BOILERS OF EVERY DESCRIPTION.

IDE AUTOMATIC ENGINES. Traction and Portable Engines.

STEAM ROAD ROLLERS.

Manufactured by FOUNDRY & MACHINE DEPT., Harrisburg, Pa., U. S. A.



ELECTRO MOTOR, SIMPLE, HOW TO MAKE.

By G. M. Hopkins.—Description of a small electro motor devised and constructed with a view to assisting amateurs to make a motor which might be driven with advantage by a current derived from a battery, and which would have sufficient power to operate a foot lathe or any machine requiring not over one man power. With 11 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 641. Price 10 cents. To be had at this office and from all newsdealers.

HIGH-GRADE ONLY.

COLUMBIA

Bicycles, Tricycles, Tandems, Safeties.

Catalogue free. POPE MFG. CO., Boston, New York, Chicago.



ELECTRICAL WELDING.—DESCRIPTION

of a method of welding by electricity devised by Mr. N. Von Benardos, of St. Petersburg. With 38 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 635. Price 10 cents. To be had at this office and from all newsdealers.



The Shorthand Machine.

Address: The American Writing Machine Co., Hartford, Conn.; New York Office, 237 Broadway.


ROYAL MICROSCOPIC SOCIETY.

Annual address by the President, Dr. Dollinger, F.R.S., delivered Feb. 8, 1888. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 643. Price 10 cents. To be had at this office and from all newsdealers.

SYRACUSE MALLEABLE IRON WORKS

W. B. BURNS PROPRIETOR

THE PHONOGRAPH.—A DETAILED description of the new and improved form of the phonograph just brought out by Edison. With 8 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 632. Price 10 cents. To be had at this office and from all newsdealers.



COMPTOMETER

ALL ARITHMETICAL PROBLEMS

Solved rapidly and accurately by using the Comptometer. Saves 40 per cent. of time. Entire relief from mental strain. Adapted to all commercial and scientific computations. Send for circular.

FELT & TARRANT MFG. CO., 52-56 Illinois St. Chicago

THE EIFFEL TOWER.—AN EXCELLENT

engraving of the Eiffel one thousand-feet-high tower, which was opened to the public a few days ago, and which is to form a part of the French Exposition attractions, may be found, with description, in the SCIENTIFIC AMERICAN SUPPLEMENT, No. 554. To be had from newsdealers or at this office. Price 10 cents.



NICKEL AND ELECTRO-PLATING APPARATUS

MATERIAL

HANSON, VAN WALKER & CO.

NEWARK, N. J.

92 LIBERTY ST. N. Y.

KEY SEATING

Machines and 20" Drills. W. P. DAVIS, Rochester, N. Y.

THE Scientific American

ESTABLISHED 1846.

The Most Popular Scientific Paper in the World.

Only \$3.00 a Year, including Postage. Weekly. 52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions. Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete List of Patents each week.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for one year—52 numbers—postage prepaid, to any subscriber in the United States or Canada, on receipt of three dollars by the publishers; six months, \$1.50; three months, \$1.00.

Clubs.—Special rates for several names, and to Post Masters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to

MUNN & CO.,

361 Broadway, New York.

THE Scientific American Supplement.

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers, and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archaeology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, \$5.00 a year, or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for \$7.00. Single copies 10 cents. Address and remit by postal order, express money order, or check.

MUNN & CO., 361 Broadway, N. Y., Publishers SCIENTIFIC AMERICAN.

Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming a large and splendid Magazine of Architecture, richly adorned with elegant plates in colors, and with other fine engravings; illustrating the most interesting examples of modern Architectural Construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with full Plans, Specifications, Sheets of Details, Estimates, etc.

The elegance and cheapness of this magnificent work have won for it the Largest Circulation of any Architectural publication in the world. Sold by all newsdealers. \$2.50 a year. Remit to

MUNN & CO., Publishers,

361 Broadway, New York.

PRINTING INKS.

THE "Scientific American" is printed with CHASE & BENEJOHNSON & CO.'S INK. Tenth and Lombard Sts., Phila., and 47 Rose St., opp. Duane St., N. Y.